Network Camera

User Manual

V4.0.8

Hikvision Digital Technology Co., Ltd.

http://www.hikvision.com

www.use-ip.co.uk
01304 827609

This manual is applied to the following camera models:

Type	Model
Bullet Camera III	DS-2CD2012-I
Bullet Camera IV	DS-2CD2212-I, DS-2CD2232-I
Dome camera V	DS-2CD2312-I, DS-2CD2332-I
Dome camera VI	DS-2CD2112-I, DS-2CD2132-I

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Thank you for purchasing our product. If there are any questions, or requests, please do not hesitate to contact the dealer.
This manual applies to Network Camera.
This manual may contain several technical incorrect places or printing errors, and the content is subject to change without notice. The updates will be added to the new version of this manual. We will readily improve or update the products or procedures described in the manual.

DISCLAIMER STATEMENT

"Underwriters Laboratories Inc. ("UL") has not tested the performance or reliability of the security or signaling aspects of this product. UL has only tested for fire, shock or casualty hazards as outlined in UL's Standard(s) for Safety, UL60950-1. UL Certification does not cover the performance or reliability of the security or signaling aspects of this product. UL MAKES NO REPRESENTATIONS, WARRANTIES OR CERTIFICATIONS WHATSOEVER REGARDING THE PERFORMANCE OR RELIABILITY OF ANY SECURITY OR SIGNALING RELATED FUNCTIONS OF THIS PRODUCT."

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Regulatory Information

FCC Information

FCC compliance: This equipment has been tested and found to comply with the limits for a digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Conditions

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

EU Conformity Statement

CE This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the Low Voltage Directive 2006/95/EC, the EMC Directive 2004/108/EC.

2002/96/EC (WEEE directive): Products marked with this symbol cannot be disposed of as unsorted municipal waste in the European Union. For proper recycling, return this product to your local supplier upon the purchase of equivalent new equipment, or dispose of it at designated collection points. For more information see: www.recyclethis.info.

2006/66/EC (battery directive): This product contains a battery that cannot be disposed of as unsorted municipal waste in the European Union. See the product documentation for specific battery information. The battery is marked with this symbol, which may include lettering to indicate cadmium (Cd), lead (Pb), or mercury (Hg). For proper recycling, return the battery to your supplier or to a designated collection point. For more information see: www.recyclethis.info.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Safety Instruction

These instructions are intended to ensure that the user can use the product correctly to avoid danger or property loss.

The precaution measure is divided into 'Warnings' and 'Cautions':

Warnings: Serious injury or death may be caused if any of these warnings are neglected.

Cautions: Injury or equipment damage may be caused if any of these cautions are neglected.

Warnings Follow these safeguards to prevent serious injury or death.	**Cautions** Follow these precautions to prevent potential injury or material damage.

Warnings:

- Please adopt the power adapter which can meet the safety extra low voltage (SELV) standard. And source with DC 12V or AC 24V (depending on models) according to the IEC60950-1 and Limited Power Source standard.
- If the product does not work properly, please contact your dealer or the nearest service center. Never attempt to disassemble the camera yourself. (We shall not assume any responsibility for problems caused by unauthorized repair or maintenance.)
- To reduce the risk of fire or electrical shock, do not expose this product to rain or moisture.
- This installation should be made by a qualified service person and should conform to all the local codes.
- Please install blackouts equipment into the power supply circuit for convenient supply interruption.
- Please make sure that the ceiling can support more than 50(N) Newton gravities if the camera is fixed to the ceiling.
- If the product does not work properly, please contact your dealer or the nearest service center. Never attempt to disassemble the camera yourself. (We shall not assume any responsibility for problems caused by unauthorized repair or maintenance.)

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Cautions:

- Make sure the power supply voltage is correct before using the camera.
- Do not drop the camera or subject it to physical shock.
- Do not touch sensor modules with fingers. If cleaning is necessary, use a clean cloth with a bit of ethanol and wipe it gently. If the camera will not be used for an extended period of time, put on the lens cap to protect the sensor from dirt.
- Do not aim the camera lens at the strong light such as sun or incandescent lamp. The strong light can cause fatal damage to the camera.
- The sensor may be burned out by a laser beam, so when any laser equipment is being used, make sure that the surface of the sensor not be exposed to the laser beam.
- Do not place the camera in extremely hot, cold temperatures (the operating temperature should be between -10°C ~ 60°C), dusty or damp environment, and do not expose it to high electromagnetic radiation.
- To avoid heat accumulation, good ventilation is required for a proper operating environment.
- Keep out of water and any liquid.
- While shipping, the camera should be packed in its original packing.
- Improper use or replacement of the battery may result in hazard of explosion. Please use the manufacturer recommended battery type.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Table of Contents

CHAPTER 1 SYSTEM REQUIREMENT 8

CHAPTER 2 NETWORK CONNECTION 9

2.1 SETTING THE NETWORK CAMERA OVER THE LAN 9
2.1.1 Wiring over the LAN 9
2.1.2 Detecting and Changing the IP Address 10
2.2 SETTING THE NETWORK CAMERA OVER THE WAN 11
2.2.1 Static IP Connection 11
2.2.2 Dynamic IP Connection 12

CHAPTER 3 ACCESS TO THE NETWORK CAMERA 14

3.1 ACCESSING BY WEB BROWSERS 14
3.2 ACCESSING BY CLIENT SOFTWARE 16
3.2.1 Installing iVMS-4200 Software 16
3.2.2 Installing iVMS-4500 Software 17

CHAPTER 4 LIVE VIEW 18

4.1 LIVE VIEW PAGE 18
4.2 STARTING LIVE VIEW 19
4.3 RECORDING AND CAPTURING PICTURES MANUALLY 20
4.4 OPERATING PTZ CONTROL 20
4.4.1 PTZ Control Panel 21
4.4.2 Setting / Calling a Preset 21
4.5 CONFIGURING LIVE VIEW PARAMETERS 22

CHAPTER 5 NETWORK CAMERA CONFIGURATION 24

5.1 CONFIGURING LOCAL PARAMETERS 24
5.2 CONFIGURING TIME SETTINGS 25
5.3 CONFIGURING NETWORK SETTINGS 27
5.3.1 Configuring TCP/IP Settings 27
5.3.2 Configuring Port Settings 28
5.3.3 Configuring PPPoE Settings 29
5.3.4 Configuring DDNS Settings 29
5.3.5 Configuring SNMP Settings 31
5.3.6 Configuring 802.1X Settings 33
5.3.7 Configuring QoS Settings 33
5.3.8 Configuring FTP Settings 34
5.3.9 Configuring UPnP Settings 35
5.4 CONFIGURING VIDEO AND AUDIO SETTINGS 35
5.4.1 Configuring Video Settings 35
5.4.2 Configuring Audio Settings 37
5.5 CONFIGURING IMAGE PARAMETERS 37
5.5.1 Configuring Display Settings 37

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

5.5.2 Configuring OSD Settings 39
5.5.3 Configuring Text Overlay Settings 40
5.5.4 Configuring Privacy Mask 41
5.6 Configuring and Handling Alarms 42
5.6.1 Configuring Motion Detection 42
5.6.2 Configuring Tamper-proof Alarm 45
5.6.3 Configuring Video Loss Alarm 47
5.6.4 Configuring External Alarm Input 48
5.6.5 Configuring Alarm Output 49
5.6.6 Handling Exception 50
5.6.7 Configuring Email Settings 51
5.6.8 Configuring Snapshot Settings 52

CHAPTER 6 STORAGE SETTINGS 53

6.1 Configuring NAS Settings 54
6.2 Configuring Recording Schedule 55

CHAPTER 7 PLAYBACK 59

CHAPTER 8 LOG SEARCHING 61

CHAPTER 9 OTHERS 62

9.1 Managing User Accounts 62
9.2 Configuring RTSP Authentication 64
9.3 Viewing Device Information 64
9.4 Maintenance 65
9.4.1 Rebooting the Camera 65
9.4.2 Restoring Default Settings 65
9.4.3 Importing/Exporting Configuration File 66
9.4.4 Upgrading the System 66
9.5 RS-232 Settings 67
9.6 RS-485 Settings 68

APPENDIX 68

Appendix 1 SADP Software Introduction 68
Appendix 2 Port Mapping 71

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Chapter 1 System Requirement

Operating System: Microsoft Windows XP SP1 and above version / Vista / Win7 / Server 2003 / Server 2008 32bits
CPU: Intel Pentium IV 3.0 GHz or higher
RAM: 1G or higher
Display: 1024×768 resolution or higher
Web Browser: Internet Explorer 6.0 and above version, Apple Safari 5.02 and above version, Mozilla Firefox 3.5 and above version and Google Chrome8 and above versions.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Chapter 2 Network Connection

Before you start:

- If you want to set the network camera via a LAN (Local Area Network), please refer to *Section 2.1* ***Setting the Network Camera over the LAN***.
- If you want to set the network camera via a WAN (Wide Area Network), please refer to *Section 2.2* ***Setting the Network Camera over the WAN***.

2.1 Setting the Network Camera over the LAN

Purpose:

To view and configure the camera via a LAN, you need to connect the network camera in the same subnet with your computer, and install the SADP or iVMS-4200 software to search and change the IP of the network camera.

Note: For the detailed introduction of SADP, please refer to Appendix 1.

2.1.1 Wiring over the LAN

The following figures show the two ways of cable connection of a network camera and a computer:

Purpose:

- To test the network camera, you can directly connect the network camera to the computer with a network cable as shown in Figure 2-1.
- Refer to the Figure 2-2 to set the network camera over the LAN via a switch or a router.

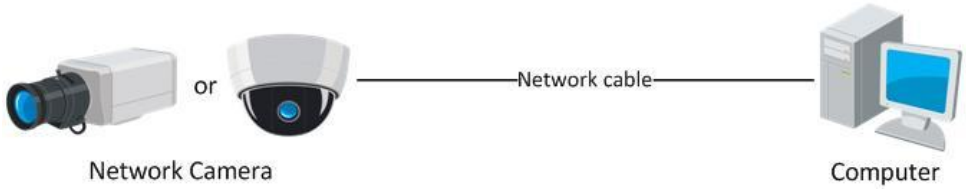

Figure 2-1 Connecting Directly

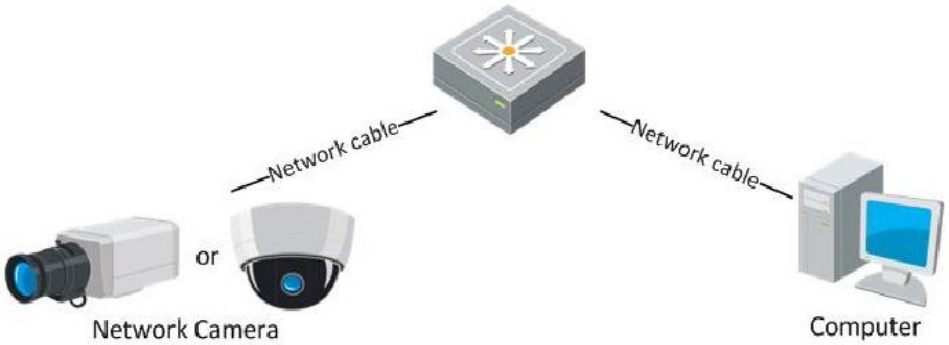

Figure 2-2 Connecting via a Switch or a Router

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

2.1.2 Detecting and Changing the IP Address

You need the IP address to visit the network camera.

Steps:

1. To get the IP address, you can choose either of the following methods:
   - ♦ Use SADP, a software tool which can automatically detect the online network cameras in the LAN and list the device information including IP address, subnet mask, port number, device serial number, device version, etc., shown in Figure 2-3.
   - ♦ Use the client software to list the online devices. Please refer to the user manual of client software for detailed information.
2. Change the IP address and subnet mask to the same subnet as that of your computer.
3. Enter the IP address of network camera in the address field of the web browser to view the live video.

Notes:

- The default IP address is 192.0.0.64 and the port number is 8000. The default user name is admin, and password is 12345.
- For accessing the network camera from different subnets, please set the gateway for the network camera after you logged in. For detailed information, please refer to *Section 5.3.1* ***Configuring TCP/IP Settings***.

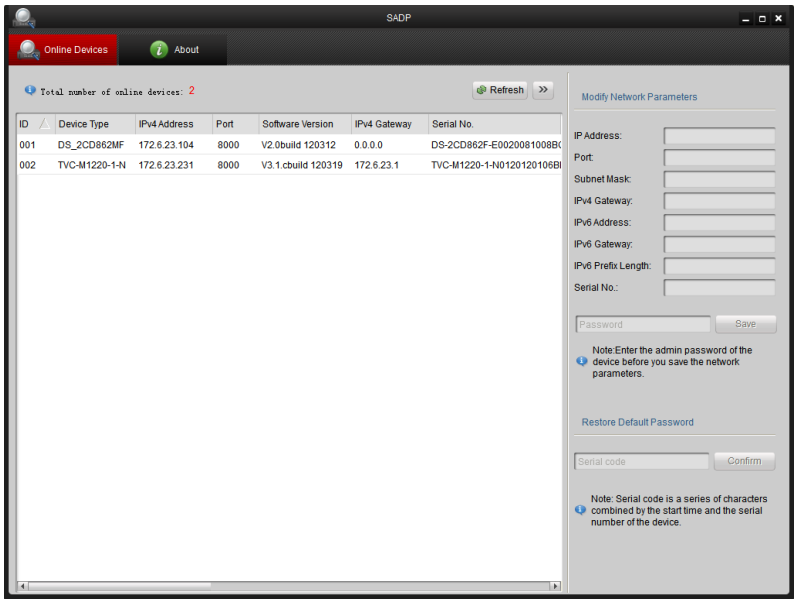

Figure 2-3 SADP Interface

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

2.2 Setting the Network Camera over the WAN

Purpose:

This section explains how to connect the network camera to the WAN with a static IP or a dynamic IP.

2.2.1 Static IP Connection

Before you start:

Please apply a static IP from an ISP (Internet Service Provider). With the static IP address, you can connect the network camera via a router or connect it to the WAN directly.

- **Connecting the network camera via a router**

Steps:

1. Connect the network camera to the router.
2. Assign a LAN IP address, the subnet mask and the gateway. Refer to *Section 2.1.2* ***Detecting and Changing the IP Address*** for detailed IP address configuration of the camera.
3. Save the static IP in the router.
4. Set port mapping, E.g., 80, 8000, 8200 and 554 ports. The steps for port mapping vary depending on different routers. Please call the router manufacturer for assistance with port mapping.

Note: Refer to Appendix 2 for detailed information about port mapping.

5. Visit the network camera through a web browser or the client software over the internet.

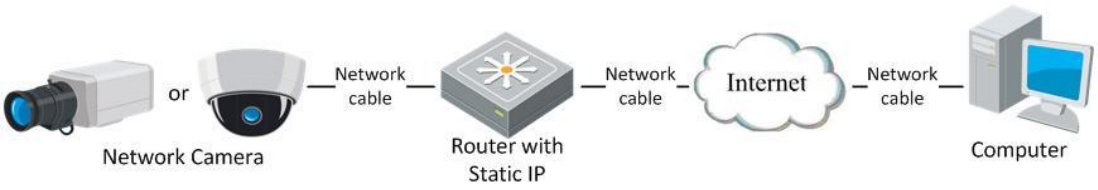

Figure 2-4 Accessing the Camera through Router with Static IP

- **Connecting the network camera with static IP directly**

You can also save the static IP in the camera and directly connect it to the internet without using a router. Refer to *Section 2.1.2* ***Detecting and Changing the IP Address*** for detailed IP address configuration of the camera.

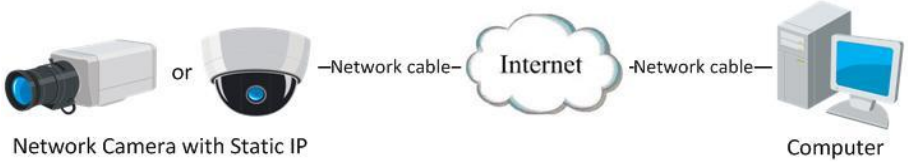

Figure 2-5 Accessing the Camera with Static IP Directly

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

2.2.2 Dynamic IP Connection

Before you start:

Please apply a dynamic IP from an ISP. With the dynamic IP address, you can connect the network camera to a modem or a router.

- **Connecting the network camera via a router**

Steps:

1. Connect the network camera to the router.
2. In the camera, assign a LAN IP address, the subnet mask and the gateway. Refer to *Section 2.1.2* ***Detecting and Changing the IP Address*** for detailed LAN configuration.
3. In the router, set the PPPoE user name, password and confirm the password.
4. Set port mapping. E.g. 80, 8000, 8200 and 554 ports. The steps for port mapping vary depending on different routers. Please call the router manufacturer for assistance with port mapping.

Note: Refer to Appendix 2 for detailed information about port mapping.

5. Apply a domain name from a domain name provider.
6. Configure the DDNS settings in the setting interface of the router.
7. Visit the camera via the applied domain name.

- **Connecting the network camera via a modem**

Purpose:

This camera supports the PPPoE auto dial-up function. The camera gets a public IP address by ADSL dial-up after the camera is connected to a modem. You need to configure the PPPoE parameters of the network camera. Refer to *Section 5.3.3* ***Configuring PPPoE Settings*** for detailed configuration.

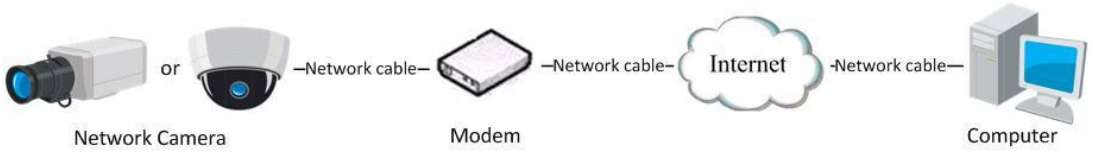

Figure 2-6 Accessing the Camera with Dynamic IP

Note: The obtained IP address is dynamically assigned via PPPoE, so the IP address always changes after rebooting the camera. To solve the inconvenience of the dynamic IP, you need to get a domain name from the DDNS provider (E.g. DynDns.com). Please follow below steps for normal domain name resolution and private domain name resolution to solve the problem.

♦ Normal Domain Name Resolution

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

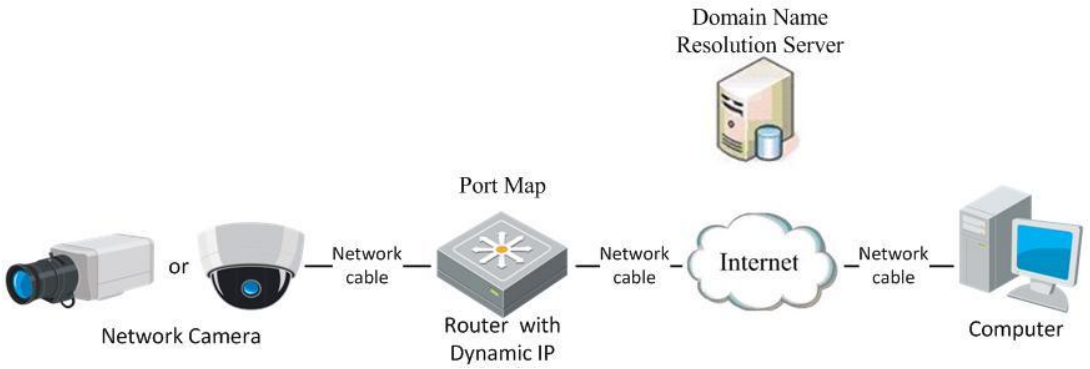

Figure 2-7 Normal Domain Name Resolution

Steps:

1. Apply a domain name from a domain name provider.
2. Configure the DDNS settings in the **DDNS Settings** interface of the network camera. Refer to *Section 5.3.4* ***Configuring DDNS Settings*** for detailed configuration.
3. Visit the camera via the applied domain name.

♦ Private Domain Name Resolution

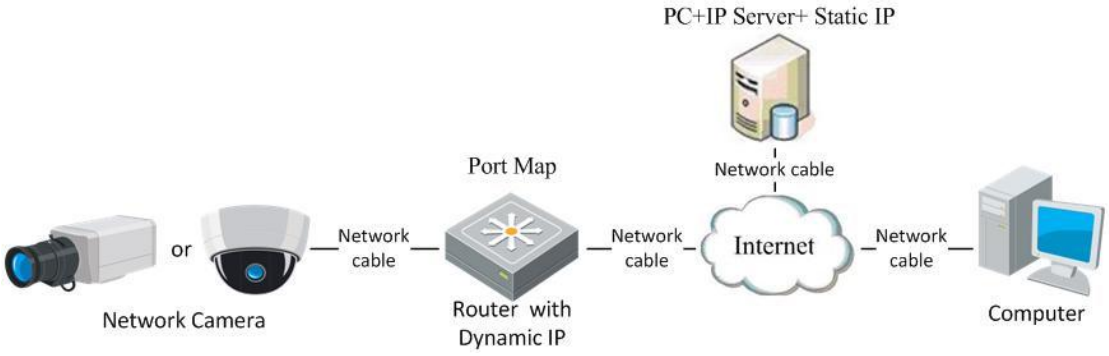

Figure 2-8 Private Domain Name Resolution

Steps:

1. Install and run the IP Server software in a computer with a static IP.
2. Access the network camera through the LAN with a web browser or the client software.
3. Enable DDNS and select IP Server as the protocol type. Refer to *Section 5.3.4* ***Configuring DDNS Settings*** for detailed configuration.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Chapter 3 Access to the Network Camera

3.1 Accessing by Web Browsers

Steps:

1. Open the web browser.
2. In the address field, input the IP address of the network camera, e.g., 192.0.0.64 and press the **Enter** key to enter the login interface.
3. Input the user name and password and click Login.

Note: The default user name is admin, password is 12345.

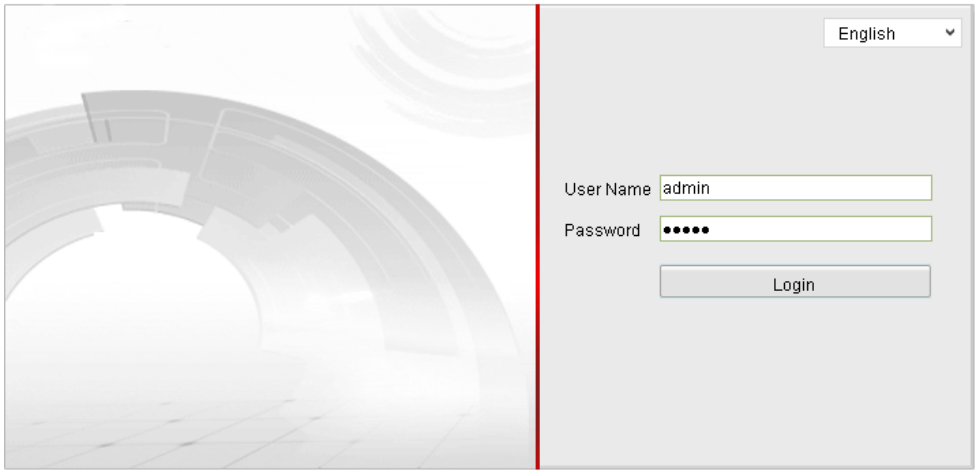

Figure 3-1 Login Interface

4. Install the plug-in before viewing the live video and operating the camera. Please follow the installation prompts to install the plug-in.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

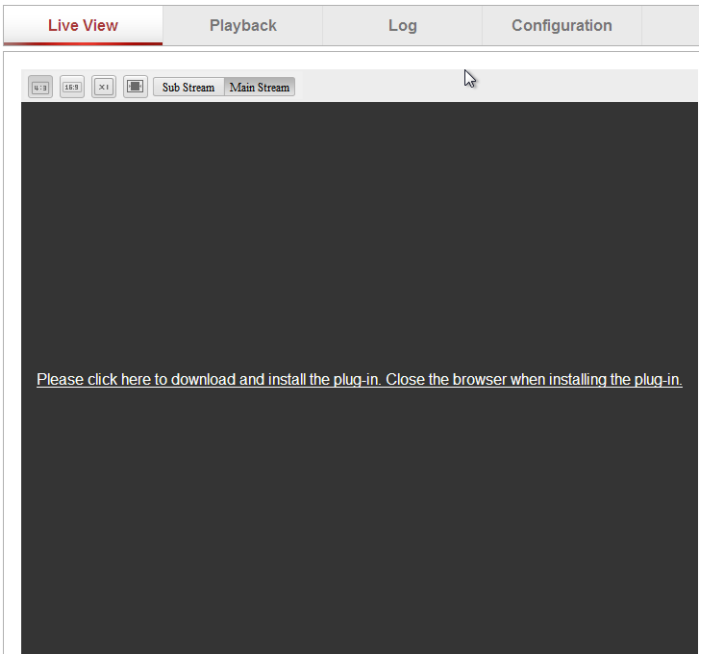

Figure 3-2 Download and Install Plug-in

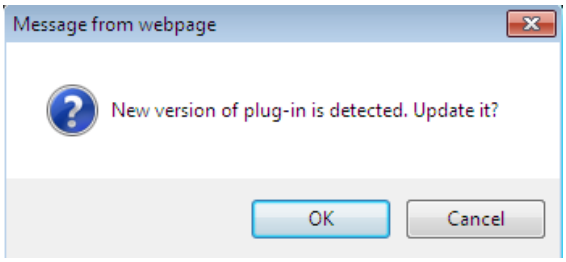

Figure 3-3 Install Plug-in (1)

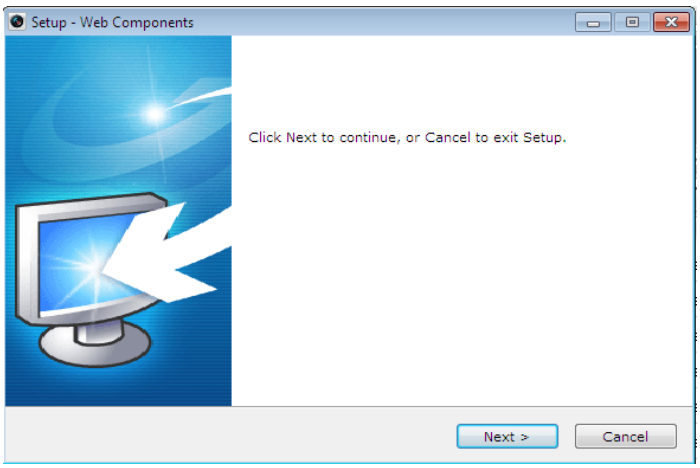

Figure 3-4 Install Plug-in (2)

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

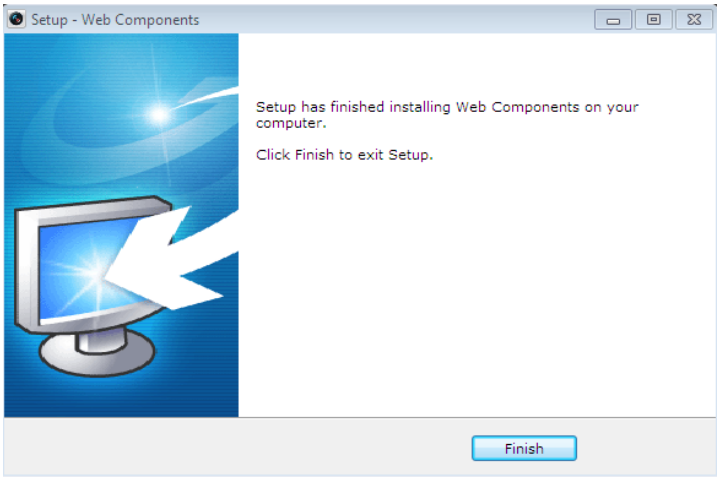

Figure 3-5 Install Plug-in (3)

Note: You may have to close the web browser to install the plug-in. Please reopen the web browser and log in again after installing the plug-in.

3.2 Accessing by Client Software

3.2.1 Installing iVMS-4200 Software

The product CD contains the iVMS-4200 client software. You can view the live video and manage the camera with the client software. You can also download the software from our website *www.hikvision.com*.

Follow the installation prompts to install the client software and WinPcap. The control panel and live view interface of iVMS-4200 are shown as bellow.

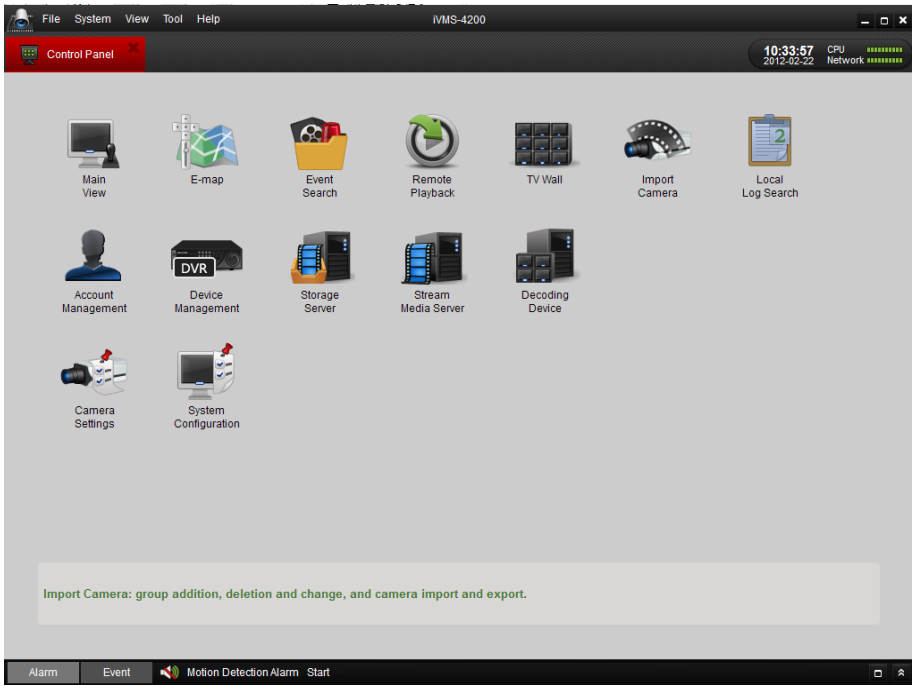

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Figure 3-6 iVMS-4200 Control Panel

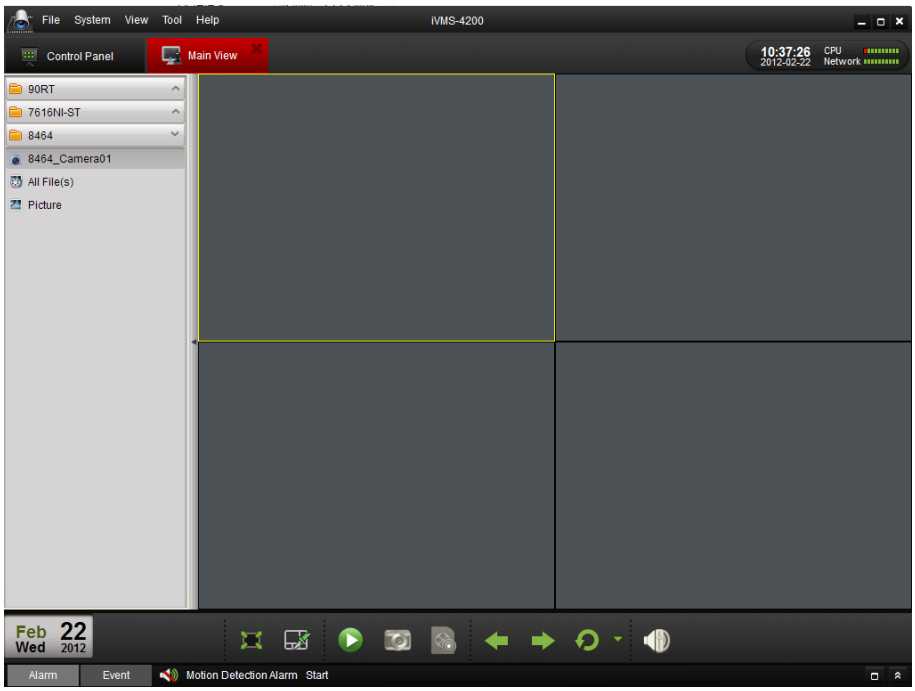

Figure 3-7 iVMS-4200 Live View Interface

Note: For detailed information about iVMS-4200 client software, please refer to the user manual of the iVMS-4200 software.

3.2.2 Installing iVMS-4500 Software

To view the camera with a mobile phone, install the iVMS-4500 client software in your mobile phone. You can find the software in the CD in the package, and you can also download the software from our website *www.hikvision.com*.

Note: For detailed information about iVMS-4500 client software, please refer to the user manual of iVMS-4500 software.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Chapter 4 Live View

4.1 Live View Page

Purpose:

The live video page allows you to view live video, capture images, realize PTZ control, set/call presets and configure video parameters.

Log in the network camera to enter the live view page, or you can click Live View on the menu bar of the main page to enter the live view page.

Descriptions of the live view page:

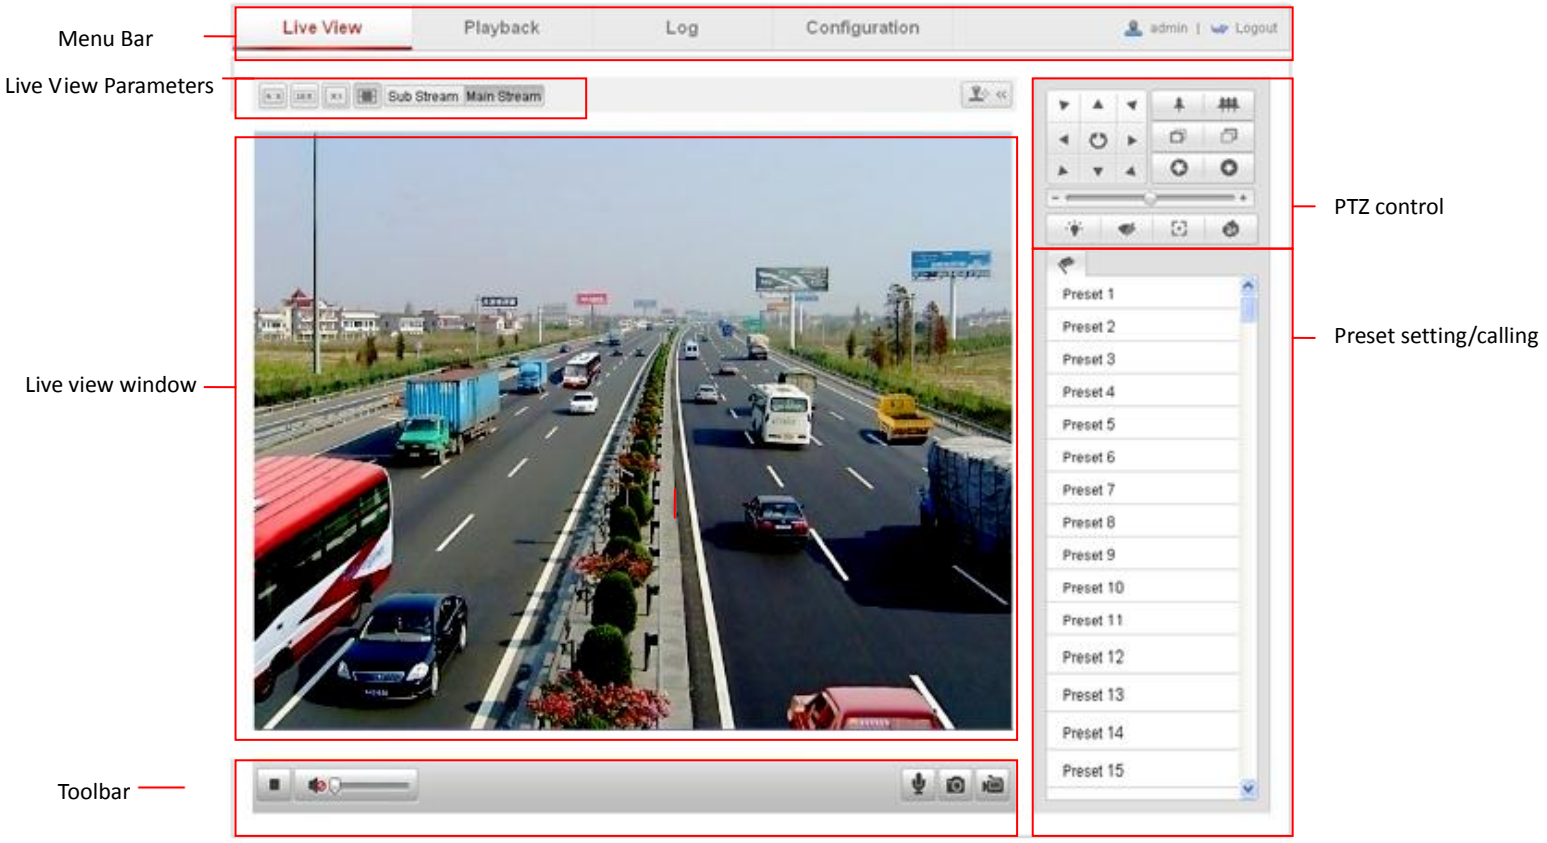

Figure 4-1 Live View Page

Menu Bar:

Click each tab to enter Live View, Playback, Log and Configuration page respectively.

Live View Window:

Display the live video.

Toolbar:

Operations on the live view page, e.g., live view, capture, record, audio on/off,

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

two-way audio, etc.

PTZ Control:

Panning, tilting and zooming actions of the camera and the lighter and wiper control (if it supports PTZ function or an external pan/tilt unit has been installed).

Preset Setting/Calling:

Set and call the preset for the camera (if supports PTZ function or an external pan/tilt unit has been installed).

Live View Parameters:

Configure the image size and stream type of the live video.

4.2 Starting Live View

In the live view window as shown in Figure 4-2, click on the toolbar to start the live view of the camera.

Figure 4-2 Start Live View

Table 4-1 Descriptions of the Toolbar

Icon	Description
	Start/Stop live view
	Manually capture the pictures displayed in live view and then save it as a JPEG file.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Icon	Description
/	Manually start/stop recording.
/	Audio on and adjust volume /Mute
/	Turn on/off microphone

Note: Before using the two-way audio function or recording with audio, please set the **Stream Type** to **Video & Audio** referring to *Section 5.4.*

Full-screen Mode

You can double-click on the live video to switch the current live view into full-screen or return to normal mode from the full-screen.

Please refer to the following sections for more information:

- Configuring remote recording in *Section 6.2* ***Configuring Recording Schedule***.
- Setting the image quality of the live video in *Section 5.1* ***Configuring Local Parameters*** and *Section 5.4.1* ***Configuring Video Settings***.
- Setting the OSD text on live video in *Section 5.5.2* ***Configuring OSD Settings***.

4.3 Recording and Capturing Pictures Manually

In the live view interface, click on the toolbar to capture the live pictures or click to record the live video. The local saving paths of the captured pictures and clips can be set on the **Configuration > Local Configuration** page. To configure remote scheduled recording, please refer to *Section 6.2*.

***Note*:** The captured image will be saved as a JPEG file in your computer.

4.4 Operating PTZ Control

Purpose:

In the live view interface, you can use the PTZ control buttons to realize pan/tilt/zoom control of the camera.

Before you start:

To realize PTZ control, the camera connected to the network must support the PTZ function or a pan/tilt unit has been installed to the camera. Please properly set the PTZ parameters on RS-485 Settings page referring to *Section 9.6* ***RS-485 Settings***.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

4.4.1 PTZ Control Panel

On the live view page, click to show the PTZ control panel or click to hide it.
Click the direction buttons to control the pan/tilt movements.

Figure 4-3 PTZ Control Panel

Click the zoom/iris/focus buttons to realize lens control.
***Notes*:**

- There are 8 direction arrows (△, ▽, ◁, ▷, ▽, ◁, ▷, ◁) in the live view window when you click and drag the mouse in the relative positions.
- For the cameras which support lens movements only, the direction buttons are invalid.

Table 4-2 Descriptions of PTZ Control Panel

Button	Description
	Zoom in/out
	Focus near/far
	Iris open/close
	Light on/off
	Wiper on/off
	One-touch focus
	Initialize lens
	Adjust speed of pan/tilt movements

4.4.2 Setting / Calling a Preset

- **Setting a Preset:**

1. In the PTZ control panel, select a preset number from the preset list.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.



Figure 4-4 Setting a Preset

2. Use the PTZ control buttons to move the lens to the desired position.
   - Pan the camera to the right or left.
   - Tilt the camera up or down.
   - Zoom in or out.
   - Refocus the lens.
3. Click to finish the setting of the current preset.
4. You can click to delete the preset.

Note: You can configure up to 128 presets.

- **Calling a Preset:**

This feature enables the camera to point to a specified preset scene manually or when an event takes place.

For the defined preset, you can call it at any time to the desired preset scene.

In the PTZ control panel, select a defined preset from the list and click to call the preset.

Figure 4-5 Calling a Preset

4.5 Configuring Live View Parameters

Purpose:

You can select the stream type and adjust the image size on the live view page.

- Click Main Stream or Sub Stream tab under the menu bar of the live view interface to select the stream type as main stream or sub-stream for live viewing.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

- Click each tab to set the image size to 4:3, 16:9, original or auto.

Note: Please refer to *Section 5.4.1* ***Configuring Video Settings*** for more detailed settings about video parameters.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Chapter 5 Network Camera Configuration

5.1 Configuring Local Parameters

Note: The local configuration refers to the parameters of the live view and other operations using the web browser.

Steps:

1. Enter the Local Configuration interface:

   Configuration > Local Configuration

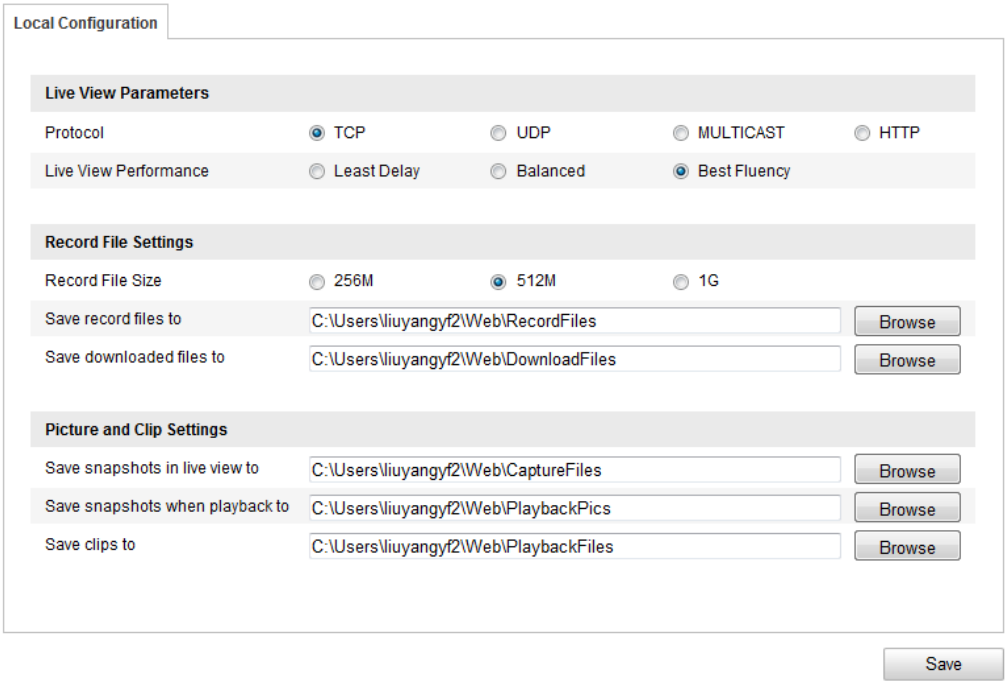

Figure 5-1 Local Configuration Interface

2. Configure the following settings:

- **Live View Parameters:** Set the protocol type, stream type, image size and live view performance.
  - **Protocol Type:** TCP, UDP, MULTICAST and HTTP are selectable.

    TCP: Ensures complete delivery of streaming data and better video quality, yet the real-time transmission will be affected.

    UDP: Provides real-time audio and video streams.

    HTTP: Allows the same quality as of TCP without setting specific ports for streaming under some network environments.

    MULTICAST: It's recommended to select MCAST type when using the Multicast function. For detailed information about Multicast, refer to *Section*

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

6.3.1 ***TCP/IP Settings****.*

- **Live View Performance:** Set the live view performance to Least Delay, Balanced or Best Fluency.

- **Record File Settings:** Set the saving path of the recorded video files.
  - **Record File Size:** Select the packed size of the manually recorded and downloaded video files to 256M, 512M or 1G.
  - **Save record files to:** Set the saving path for the manually recorded video files.
  - **Save downloaded files to:** Set the saving path for the downloaded video files in playback mode.
- **Picture and Clip Settings:** Set the saving paths of the captured pictures and clipped video files.
  - **Save snapshots in live view to:** Set the saving path of the manually captured pictures in live view mode.
  - **Save snapshots when playback to:** Set the saving path of the captured pictures in playback mode.
  - **Save clips to:** Set the saving path of the clipped video files in playback mode.

***Note*:** You can click Browse to change the directory for saving the clips and pictures.

3. Click Save to save the settings.

5.2 Configuring Time Settings

Purpose:

You can follow the instructions in this section to configure the time synchronization and DST settings.

Steps:

1. Enter the Time Settings interface:
   Configuration > Basic Configuration > System > Time Settings
   Or **Configuration > Advanced Configuration > System > Time Settings**

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

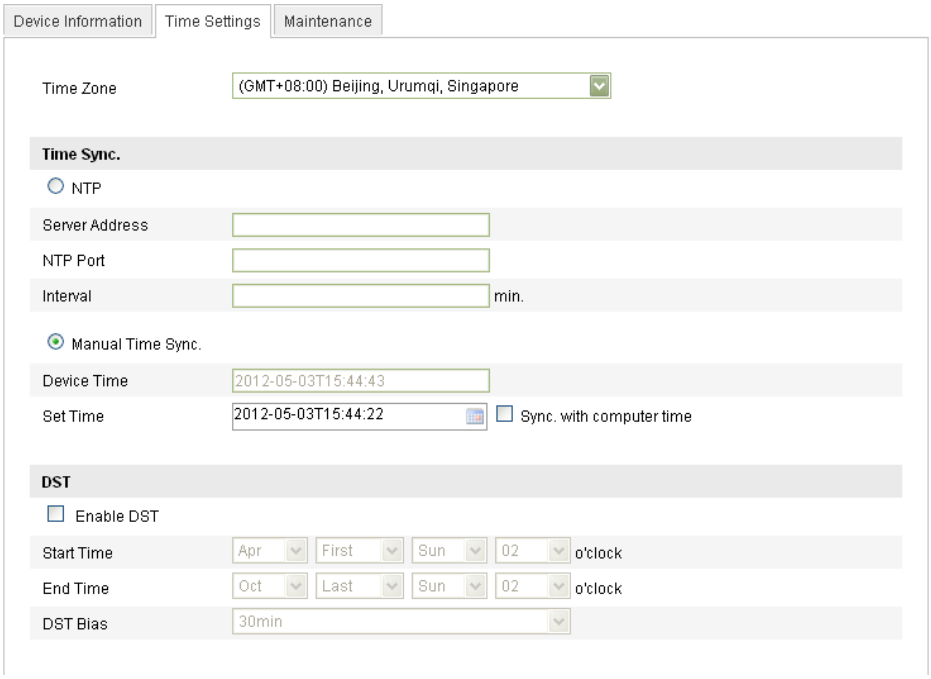

Figure 5-2 Time Settings

- Select the Time Zone.(Optional)

  Select the Time Zone when you change your location of the camera.

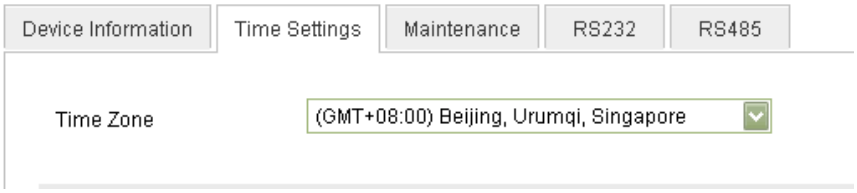

Figure 5-3 Time Zone Settings

- Configure the time synchronization by NTP Server or manually.

♦ Configuring Time Synchronization by NTP Server.

(1) Check the checkbox to enable the **NTP** function.

(2) Configure the following settings:

Server Address: IP address of NTP server.

NTP Port: Port of NTP server.

Interval: The time interval between the two synchronizing actions with NTP server.

Figure 5-4 Time Sync by NTP Server

***Note*:** If the camera is connected to a public network, you should use a NTP server

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

that has a time synchronization function, such as the server at the National Time Center (IP Address: 210.72.145.44). If the camera is set in a customized network, NTP software can be used to establish a NTP server for time synchronization.

♦ Configuring Time Synchronization Manually

Enable the **Manual Time Sync** function and then click to set the system time from the pop-up calendar.

Note: You can also check the **Sync with local time** checkbox to synchronize the time of the camera with the time of your computer.

Figure 5-5 Time Sync Manually

- Check  to enable the DST function and Set the date of the DST period. (Optional, configure if necessary.)

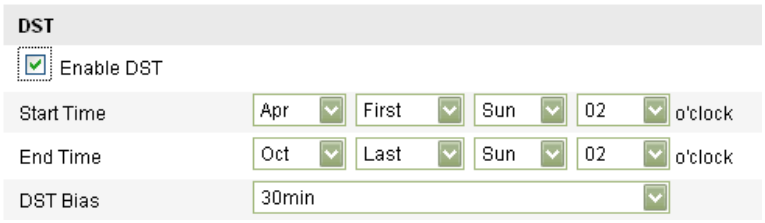

Figure 5-6 DST Settings

2. Click to save the settings.

5.3 Configuring Network Settings

5.3.1 Configuring TCP/IP Settings

Purpose:

TCP/IP settings must be properly configured before you operate the camera over network.

Steps:

1. Enter TCP/IP Settings interface:
   Configuration > Basic Configuration > Network > TCP/IP
   Or **Configuration > Advanced Configuration > Network > TCP/IP**

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

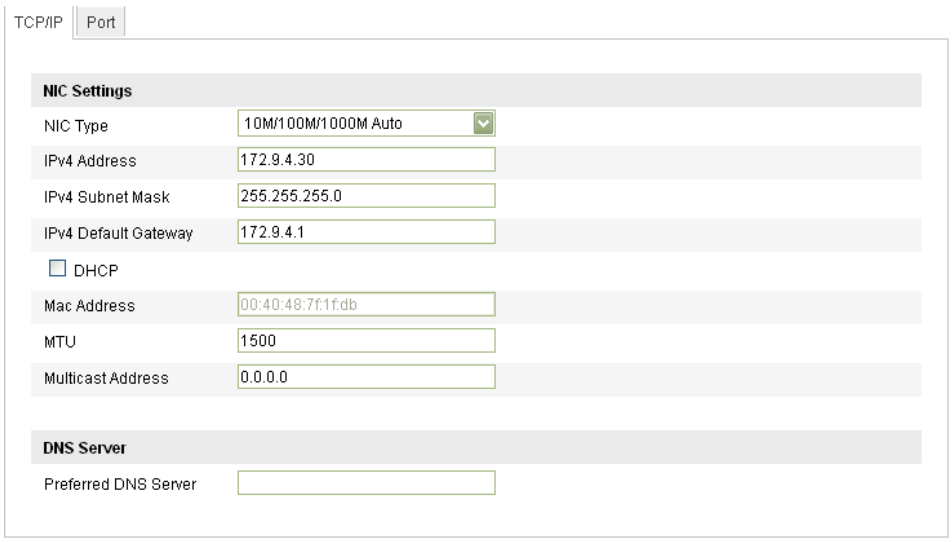

Figure 5-7 TCP/IP Settings

2. Configure the NIC settings, including the NIC Type, IPv4 Address, IPv4 Subnet Mask, IPv4 Default Gateway, MTU settings and Multicast Address.

***Notes*:**

- The valid value range of MTU is 500 ~ 1500.
- The Multicast sends a stream to the multicast group address and allows multiple clients to acquire the stream at the same time by requesting a copy from the multicast group address. Before utilizing this function, you have to enable the Multicast function of your router.

3. If the DHCP server is available, you can check ☐ DHCP to automatically obtain an IP address and other network settings from that server.
4. If the DNS server settings are required for some applications (e.g., sending email), you should properly configure the Preferred DNS Server.

Figure 5-8 DNS Server Settings

5. Click Save to save the above settings.

***Note*:** it will ask for a reboot for the settings to take effect.

5.3.2 Configuring Port Settings

Purpose:

You can set the port No. of the camera, e.g. HTTP port, RTSP port and HTTPS port.

Steps:

1. Enter the Port Settings interface:
   Configuration > Basic Configuration > Network > Port
   Or **Configuration > Advanced Configuration > Network > Port**

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

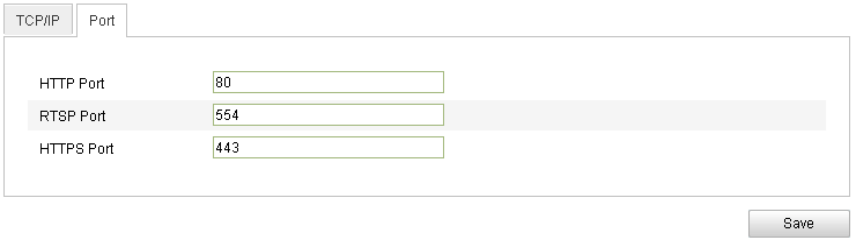

Figure 5-9 Port Settings

2. Set the HTTP port, RTSP port and HTTPS port of the camera.
   HTTP Port: The default port number is 80.
   RTSP Port: The default port number is 554.
   HTTPS Port: The default port number is 443.

3. Click Save to save the settings.

Note: it will ask for a reboot for the settings to take effect.

5.3.3 Configuring PPPoE Settings

Steps:

1. Enter the PPPoE Settings interface:
   Configuration >Advanced Configuration > Network > PPPoE

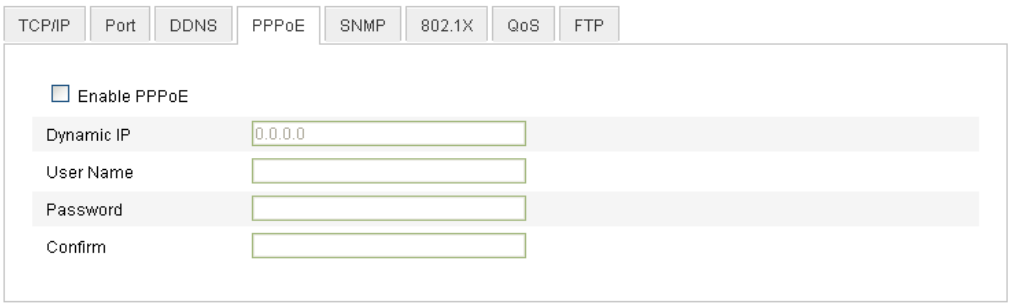

Figure 5-10 PPPoE Settings

2. Check the **Enable PPPoE** checkbox to enable this feature.
3. Enter **User Name**, **Password**, and **Confirm** password for PPPoE access.

Note: The User Name and Password should be assigned by your ISP.

4. Click Save to save and exit the interface.

Note: it will ask for a reboot for the settings to take effect.

5.3.4 Configuring DDNS Settings

Purpose:

If your camera is set to use PPPoE as its default network connection, you can use the Dynamic DNS (DDNS) for network access.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

***Before you start*:**

Registration on the DDNS server is required before configuring the DDNS settings of the camera.

Steps:

1. Enter the DDNS Settings interface:
   Configuration > Advanced Configuration > Network > DDNS

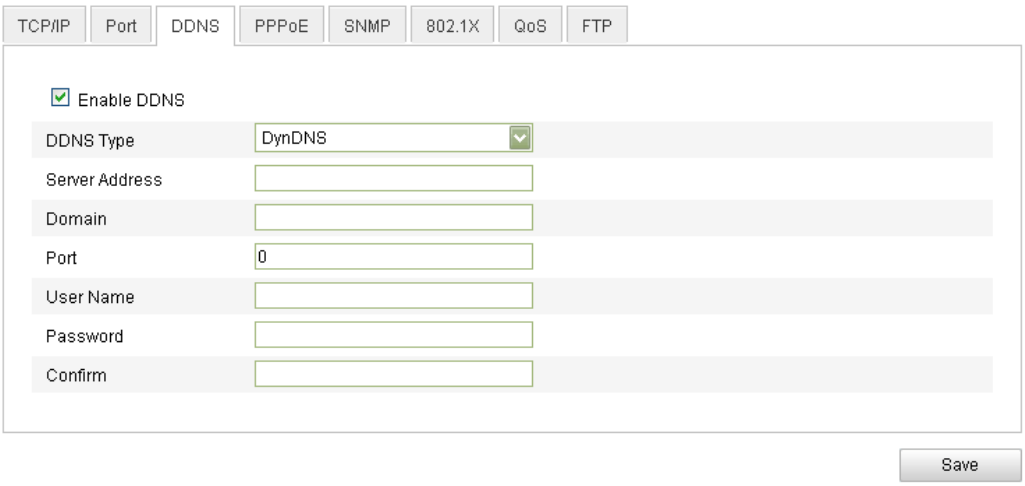

Figure 5-11 DDNS Settings

2. Check the **Enable DDNS** checkbox to enable this feature.
3. Select **DDNS Type**. Three DDNS types are selectable: HiDDNS, IPServer and DynDNS.
   - DynDNS:

   Steps:

   (1) Enter **Server Address** of DynDNS (e.g. members.dyndns.org).

   (2) In the **Domain** text field, enter the domain name obtained from the DynDNS website.

   (3) Enter the **Port** of DynDNS server.

   (4) Enter the **User Name** and **Password** registered on the DynDNS website.

   (5) Click Save to save the settings.

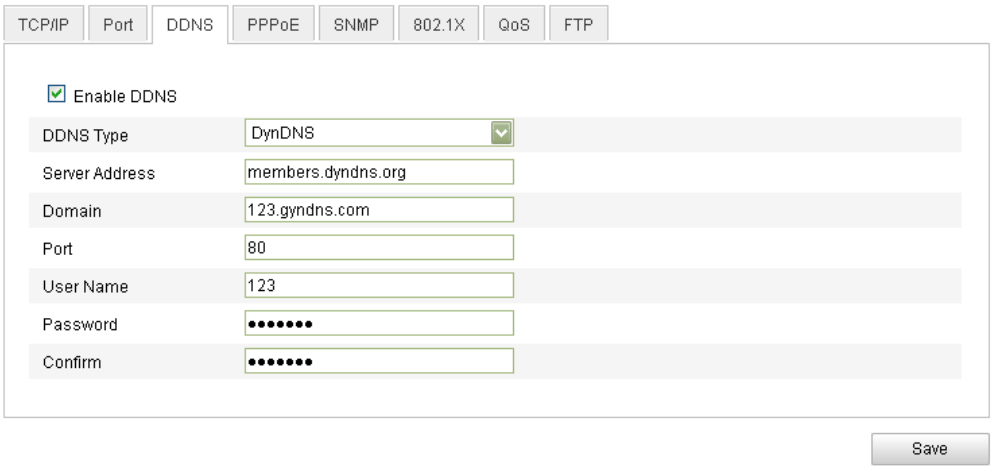

Figure 5-12 DynDNS Settings

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

- IP Server:

Steps:

(1) Enter the Server Address of the IP Server.

(2) Click Save to save the settings.

Note: For the IP Server, You have to apply a static IP, subnet mask, gateway and preferred DNS from the ISP. The **Server Address** should be entered with the static IP address of the computer that runs the IP Server software.

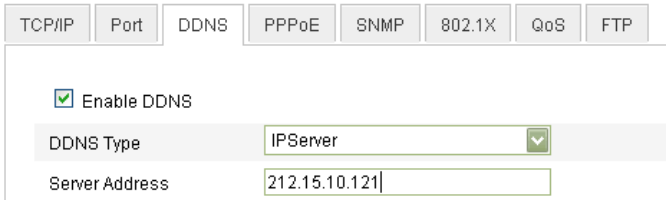

Figure 5-13 IPServer Settings

- HKDDNS

Steps:

(1) Choose the DDNS Type as HKDDNS.

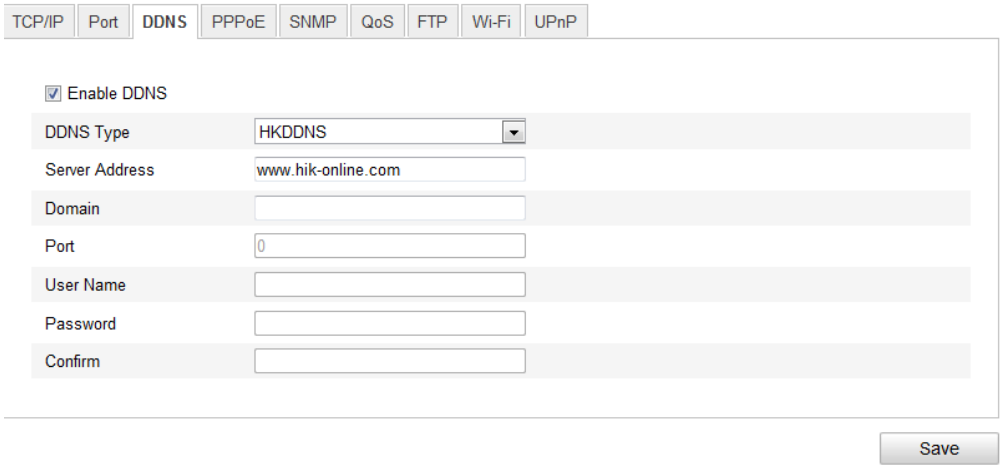

(2) Enter the Server Address www.hik-online.com

(3) Enter the Domain name of the camera. The domain is the same with the device alias in the HKDDNS server.

(4) Click Save to save the new settings.

Note: It will ask for a reboot for the settings to take effect.

5.3.5 Configuring SNMP Settings

Purpose:

You can use SNMP to get camera status, parameters and alarm related information.

Before you start:

Before setting the SNMP, please download the SNMP software and manage to receive the camera information via SNMP port. By setting the Trap Address, the camera can send the alarm event and exception messages to the surveillance center.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Note: The SNMP version you select should be the same as that of the SNMP software.

Steps:

1. Enter the SNMP Settings interface:
   Configuration > Advanced Configuration > Network > SNMP

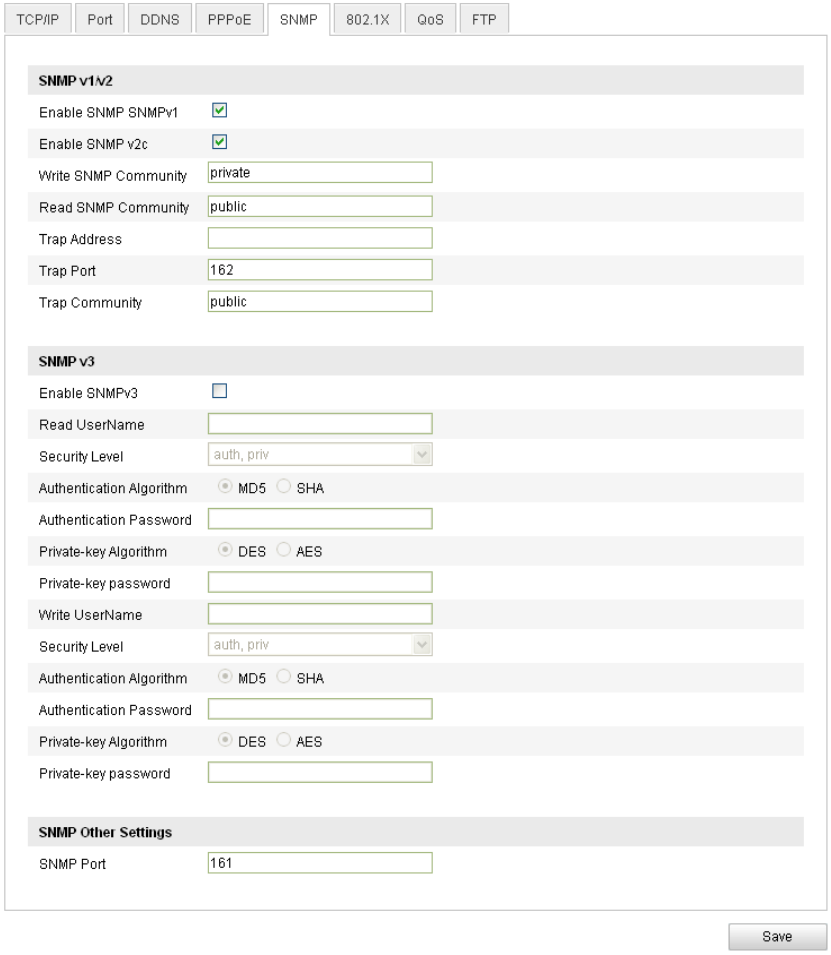

Figure 5-14 SNMP Settings

2. Check the corresponding version checkbox (Enable SNMP SNMPv1 , Enable SNMP v2c , Enable SNMPv3) to enable the feature.
3. Configure the SNMP settings.
   Note: The settings of the SNMP software should be the same as the settings you configure here.
4. Click Save to save and finish the settings.

Note: it will ask for a reboot for the settings to take effect.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

5.3.6 Configuring 802.1X Settings

Purpose:

The IEEE 802.1X standard is supported by the network cameras, and when the feature is enabled, the camera data is secured and user authentication is needed when connecting the camera to the network.

Before you start:

The switch or router to which the camera is connected must also support the IEEE 802.1X standard and a server must be configured. Please apply and register a user name and password for 802.1X in the server.

Steps:

1. Enter the 802.1X Settings interface:
   Configuration > Advanced Configuration > Network > 802.1X

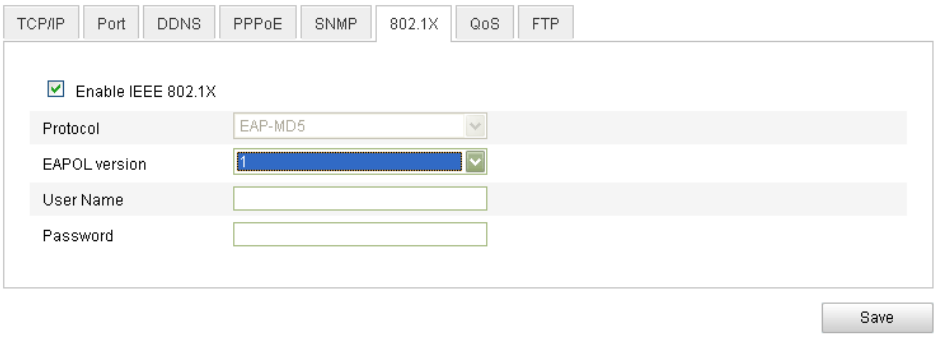

Figure 5-15 802.1X Settings

2. Check the **Enable IEEE 802.1X** checkbox to enable the feature.
3. Configure the 802.1X settings, including EAPOL version, user name and password.
   Note: The EAPOL version must be identical with that of the router or the switch.
4. Enter the user name and password to access the server.
5. Click Save to finish the settings.

Note: it will ask for a reboot for the settings to take effect.

5.3.7 Configuring QoS Settings

Purpose:

QoS (Quality of Service) can help solve the network delay and network congestion by configuring the priority of data sending.

Steps:

1. Enter the QoS Settings interface:
   Configuration >Advanced Configuration > Network > QoS

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

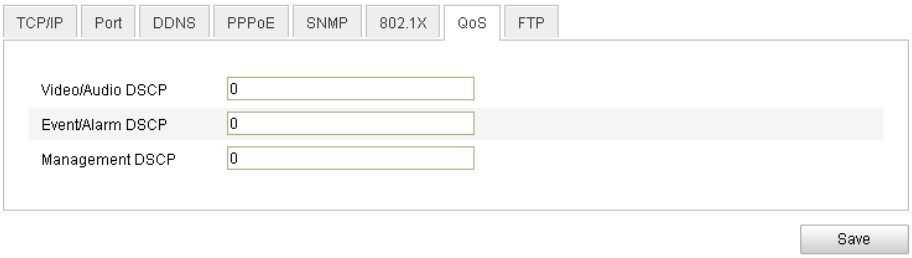

Figure 5-16 QoS Settings

2. Configure the QoS settings, including video / audio DSCP, event / alarm DSCP and Management DSCP.
   The valid value range of the DSCP is 0-63. The bigger the DSCP value is the higher the priority is.
3. Click Save to save the settings.

Note: it will ask for a reboot for the settings to take effect.

5.3.8 Configuring FTP Settings

Purpose:

The captured pictures of the camera can be uploaded to FTP server.

Steps:

1. Enter the FTP Settings interface:
   Configuration >Advanced Configuration > Network > FTP

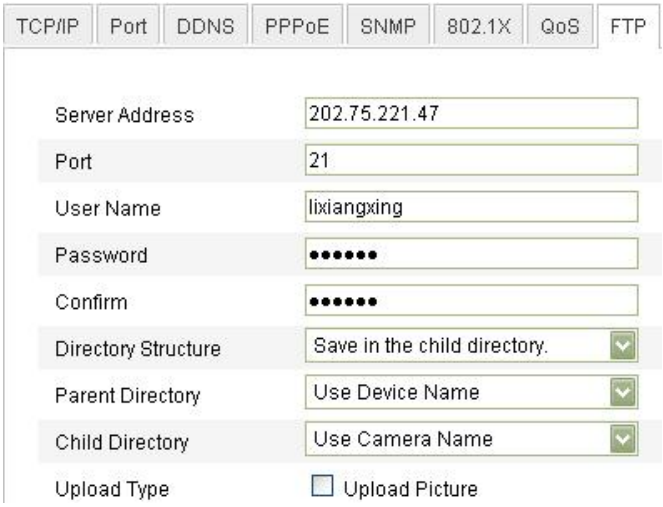

Figure 5-17 FTP Settings

2. Configure the FTP settings, including server address, port, user name, password, directory and upload type.
   Directory: In the **Directory Structure** field, you can select the root directory, parent directory and child directory. When the parent directory is selected, you have the option to use the Device Name, Device Number or Device IP for the name of the directory; and when the Child Directory is selected, you can use the

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Camera Name or Camera No. as the name of the directory.
Upload type: To enable uploading the captured picture to the FTP server.

3. Click Save to save the settings.

Notes: If you want to upload the captured pictures to FTP server, you have to enable the continuous snapshot or event-triggered snapshot on **Snapshot** page. For detailed information, please refer to the *Section 6.6.8.*
It will ask for a reboot for the settings to take effect.

5.3.9 Configuring UPnP Settings

Universal Plug and Play (UPnP) is a networking architecture that provides compatibility among networking equipment, software and other hardware devices. The UPnP protocol allows devices to connect seamlessly and to simplify the implementation of networks in the home and corporate environments.
With the function enabled, you don't need to configure the port mapping for each port, and the camera is connected to the Wide Area Network via the router.

Steps:

1. Enter the UPnP settings interface.
   Configuration >Advanced Configuration > Network > UPnP
2. Click on the arrow button and choose to enable or disable the UPnP function.

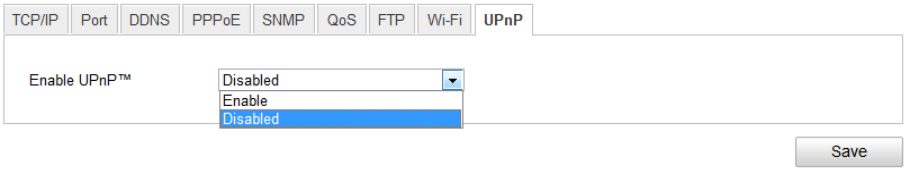

Figure 5-18 Configure UPnP Settings

3. Click Save to save the settings.

5.4 Configuring Video and Audio Settings

5.4.1 Configuring Video Settings

Steps:

1. Enter the Video Settings interface:
   Configuration >Basic Configuration > Video / Audio > Video
   Or **Configuration > Advanced Configuration > Video / Audio > Video**

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

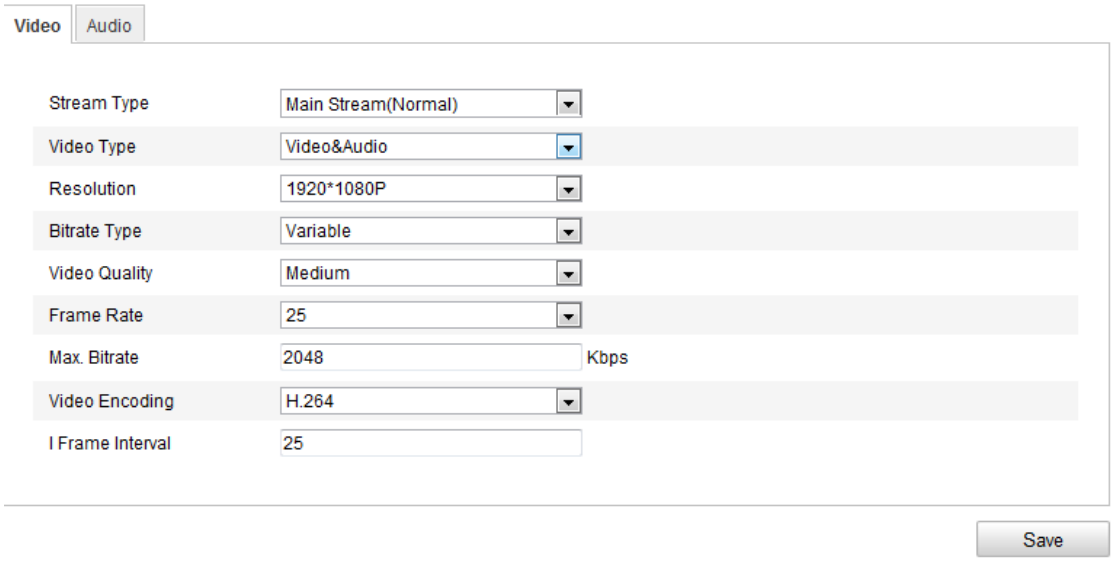

Figure 5-19 Configure Video Settings

2. Select the **Stream Type** of the camera to main stream (normal) or sub-stream.
   The main stream is usually for recording and live viewing with good bandwidth, and the sub-stream can be used for live viewing when the bandwidth is limited. Refer to the *Section 6.1* ***Configuring Local Parameters*** for switching the main stream and sub-stream for live viewing.
3. You can customize the following parameters for the selected main stream or sub-stream:
   Video Type:
   Select the stream type to video stream, or video & audio composite stream. The audio signal will be recorded only when the **Video Type** is **Video & Audio**.
   Resolution:
   Select the resolution of the video output.
   Bitrate Type:
   Select the bitrate type to constant or variable.
   Video Quality:
   When bitrate type is selected as **Variable**, 6 levels of video quality are selectable.
   Frame Rate:
   Set the frame rate to 1/16 to 25 fps. The frame rate is to describe the frequency at which the video stream is updated and it is measured by frames per second (fps). A higher frame rate is advantageous when there is movement in the video stream, as it maintains image quality throughout.
   Max. Bitrate:
   Set the max. bitrate to 32 to 16384 Kbps. The higher value corresponds to the higher video quality, but the higher bandwidth is required.
   Video Encoding:
   When the **Stream Type** of the camera is main stream, the **Video Encoding** standard can be set to H.264.
   When the **Stream Type** of the camera is sub-stream, the **Video Encoding** standard can be set to H.264, MJPEG.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

I Frame Interval:
Set the I-Frame interval as 1 to 400.

4. Click Save to save the settings.

5.4.2 Configuring Audio Settings

Steps:

1. Enter the Audio Settings interface
   Configuration > Basic Configuration > Video / Audio > Audio
   Or **Configuration > Advanced Configuration > Video / Audio > Audio**

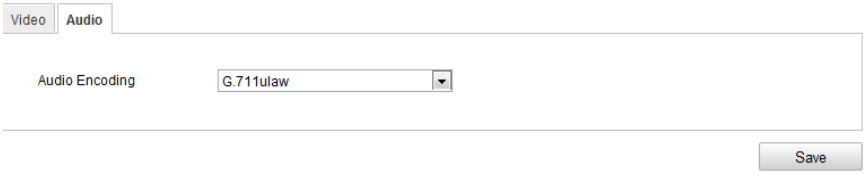

Figure 5-20 Audio Settings

2. Configure the following settings.
   Audio Encoding: G.711 ulaw, G.711alaw and G.726 are selectable.
3. Click Save to save the settings.

5.5 Configuring Image Parameters

5.5.1 Configuring Display Settings

Purpose:

You can set the image quality of the camera, including brightness, contrast, saturation, hue, sharpness, etc.

Note: The Display parameters vary depending on the camera model.

Steps:

1. Enter the Display Settings interface:

Configuration > Basic Configuration> Image> Display Settings
Or Configuration > Advanced Configuration> Image> Display Settings

2. Set the image parameters of the camera.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Figure 5-21 Display Settings

Descriptions of parameter configuration:

Exposure Time:

Speeds from 1/25 to 1/100,000 are selectable.

Iris Mode:

Auto and Manual are selectable.

Video Standard:

50 Hz and 60 Hz are selectable. You can choose the different standards according to the lightening power frequency of the country.

Day/Night Switch:

Day, Night and Auto are selectable.

Sensitivity

The Sensitivity of Day/Night switch can be set Low, Normal or High.

Switch Time:

Day/Night switch time is to adjust the time of day/night switch.

BLC Area:

BLC area is the area sense the light intensity, Close, Up, Down, Left, Right and Center are selectable.

White Balance:

Auto white balance 1. /AWB1, Auto white balance 2. /AWB2 and Auto are selectable.

Digital Noise Reduction:

Close, Normal Mode and Expert Mode are selectable.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

5.5.2 Configuring OSD Settings

Purpose:

You can customize the camera name and time on the screen.

Steps:

1. Enter the OSD Settings interface:

Configuration > Advanced Configuration > Image > OSD Settings

Figure 5-22 OSD Settings

2. Check the corresponding checkbox to select the display of camera name, date or week if required.
3. Edit the camera name in the text field of **Camera Name**.
4. Select from the drop-down list to set the time format, date format and display mode.
5. You can use the mouse to click and drag the text frame IPCamera 01 in the live view window to adjust the OSD position.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Figure 5-23 Adjust OSD Location

6. Click Save to activate above settings.

5.5.3 Configuring Text Overlay Settings

Purpose:

You can customize the text overlay.

Steps:

1. Enter the Text Overlay Settings interface:

Configuration > Advanced Configuration > Image > Text Overlay

2. Check the checkbox in front of textbox to enable the on-screen display.
3. Input the characters in the textbox.
4. Use the mouse to click and drag the red text frame Text in the live view window to adjust the text overlay position.
5. Click Save.

Note: There are up to 4 text overlays configurable.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Figure 5-24 Text Overlay Settings

5.5.4 Configuring Privacy Mask

Purpose:

Privacy mask enables you to cover certain areas on the live video to prevent certain spots in the surveillance area from being live viewed and recorded.

Steps:

1. Enter the Privacy Mask Settings interface:

Configuration > Advanced Configuration> Image > Privacy Mask

2. Check the checkbox of **Enable Privacy Mask** to enable this function.
3. Click Draw Area.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Figure 5-25 Privacy Mask Settings

4. Click and drag the mouse in the live video window to draw the mask area.

Note: You are allowed to draw up to 4 areas on the same image.

5. Click Stop Drawing to finish drawing or click Clear All to clear all of the areas you set without saving them.

6. Click Save to save the settings.

5.6 Configuring and Handling Alarms

Purpose:

This section explains how to configure the network camera to respond to alarm events, including motion detection, external alarm input, video loss, tamper-proof and exception. These events can trigger the alarm actions, such as Notify Surveillance Center, Send Email, Trigger Alarm Output, etc.

For example, when an external alarm is triggered, the network camera sends a notification to an e-mail address.

5.6.1 Configuring Motion Detection

Purpose:

Motion detection is a feature which can take alarm response actions and record the video for the motion occurred in the surveillance scene.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Tasks:

1. Set the Motion Detection Area.

Steps:

(1) Enter the motion detection settings interface

Configuration > Advanced Configuration> Events > Motion Detection

(2) Check the checkbox of Enable Motion Detection.

Figure 5-26 Enable Motion Detection

(3) Click Draw Area. Click and drag the mouse on the live video image to draw a motion detection area.

Note: You can draw up to 8 motion detection areas on the same image.

(4) Click Stop Drawing to finish drawing.

Note: You can click Clear All to clear all of the areas.

(5) Move the slider Sensitivity to set the sensitivity of the detection.

2. Set the Arming Schedule for Motion Detection.

Steps:

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

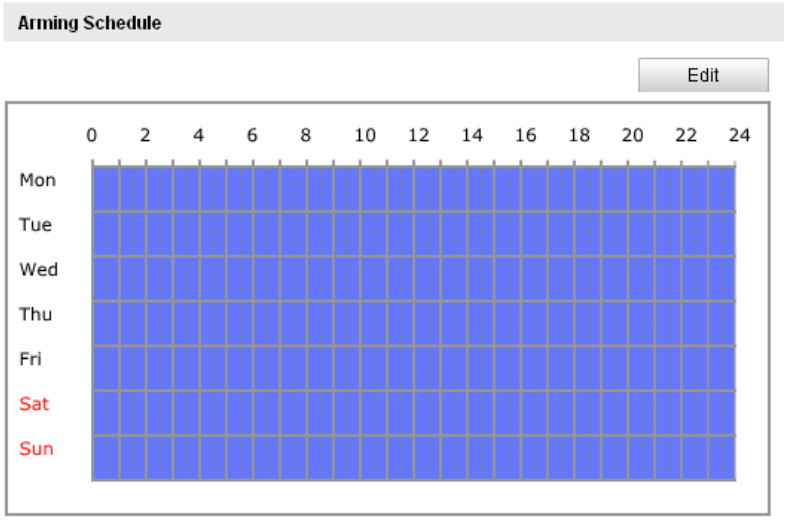

Figure 5-27 Arming Time

(1) Click Edit to edit the arming schedule. The Figure 5-28 shows the editing interface of the arming schedule.

(2) Choose the day you want to set the arming schedule.

(3) Click to set the time period for the arming schedule.

(4) After you set the arming schedule, you can copy the schedule to other days (Optional).

(5) Click OK to save the settings.

Note: The time of each period can't be overlapped. Up to 4 periods can be configured for each day.

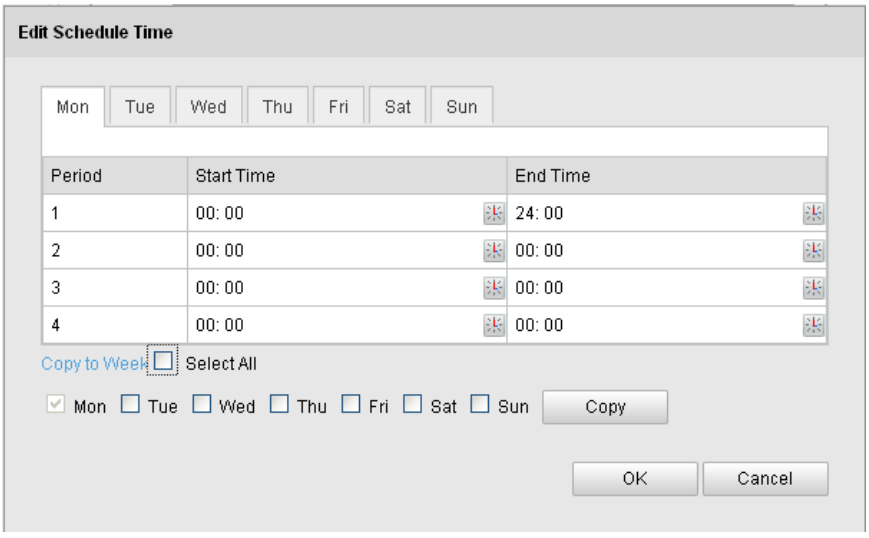
Edit Schedule Time
Mon Tue Wed Thu Fri Sat Sun
Period Start Time End Time
1 00: 00 24: 00
2 00: 00 00: 00
3 00: 00 00: 00
4 00: 00 00: 00
Copy to Week Select All
Mon Tue Wed Thu Fri Sat Sun Copy
OK Cancel

Figure 5-28 Arming Time Schedule

3. Set the Alarm Actions for Motion Detection.

Purpose:

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

You can specify the linkage method when an event occurs. The following contents are about how to configure the different types of linkage method.

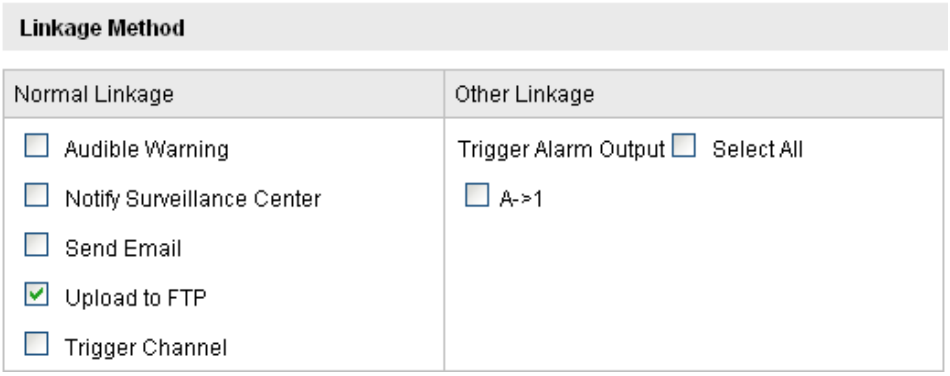

Figure 5-29 Linkage Method

Steps:

(1) Check the checkbox to select the linkage method. Audible warning, notify surveillance center, send email, upload to FTP, trigger channel and trigger alarm output are selectable (Optional).

- **Audible Warning**

Trigger the audible warning locally.

- **Notify Surveillance Center**

Send an exception or alarm signal to remote management software when an event occurs.

- **Send Email**

Send an email with alarm information to a user or users when an event occurs.

Note: To send the Email when an event occurs, you need to refer to *Section 6.6.7* to set the related parameters.

- **Upload to FTP**

Capture the image when an alarm is triggered and upload the picture to a FTP server.

Note: Set the FTP address and the remote FTP server first. Refer to *Section 6.3.8* for detailed information.

- **Trigger Channel**

The video will be recorded when the motion is detected. You have to set the recording schedule to realize this function. Please refer to *Section 7.2* for detailed information.

- **Trigger Alarm Output**

Trigger one or more external alarm outputs when an event occurs.

Note: To trigger an alarm output when an event occurs, please refer to *Section 6.6.5* to set the related parameters.

5.6.2 Configuring Tamper-proof Alarm

Purpose:

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

You can configure the camera to trigger the alarm when the lens is covered and take alarm response action.

Steps:

1. Enter the Tamper-proof Settings interface:

Configuration > Advanced Configuration > Events > Tamper-proof

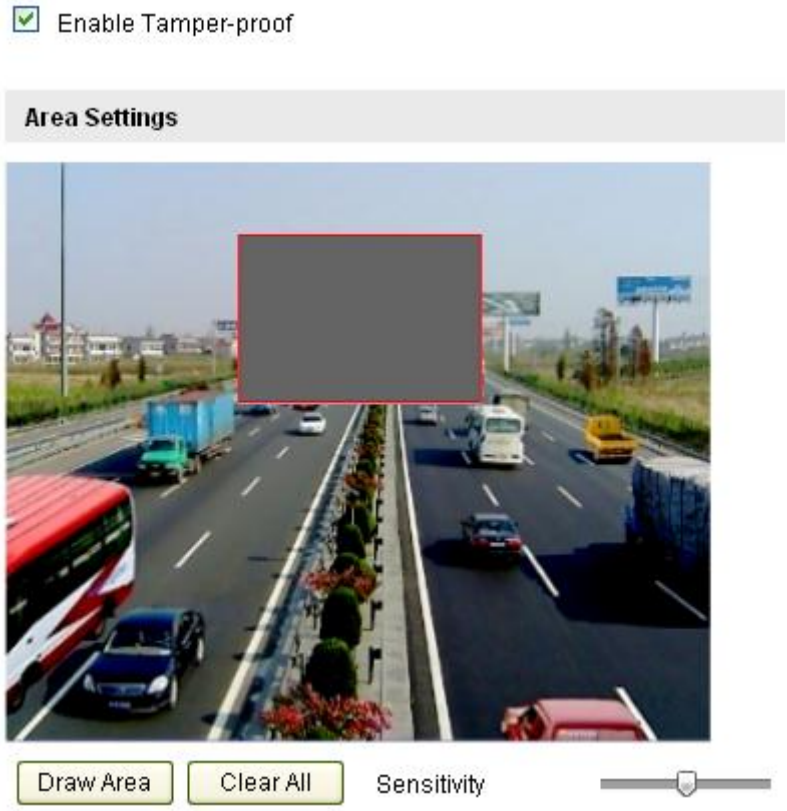

Figure 5-30 Tamper-proof Alarm

2. Check **Enable Tamper-proof** checkbox to enable the tamper-proof detection.
3. Set the tamper-proof area; refer to *Step 1* ***Set the Motion Detection Area*** in *Section 6.6.1.*
4. Click Edit to edit the arming schedule for tamper-proof. The arming schedule configuration is the same as the setting of the arming schedule for motion detection. Refer to *Step 2* ***Set the Arming Schedule for Motion Detection*** in *Section 6.6.1.*
5. Check the checkbox to select the linkage method taken for the tamper-proof. Audible warning, notify surveillance center, send email and trigger alarm output are selectable. Please refer to *Step 3* ***Set the Alarm Actions for Motion Detection*** in *Section 6.6.1.*
6. Click Save to save the settings.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

5.6.3 Configuring Video Loss Alarm

Steps:

1. Enter the Video Loss Setting interface:

Configuration > Advanced Configuration> Events > Video Loss

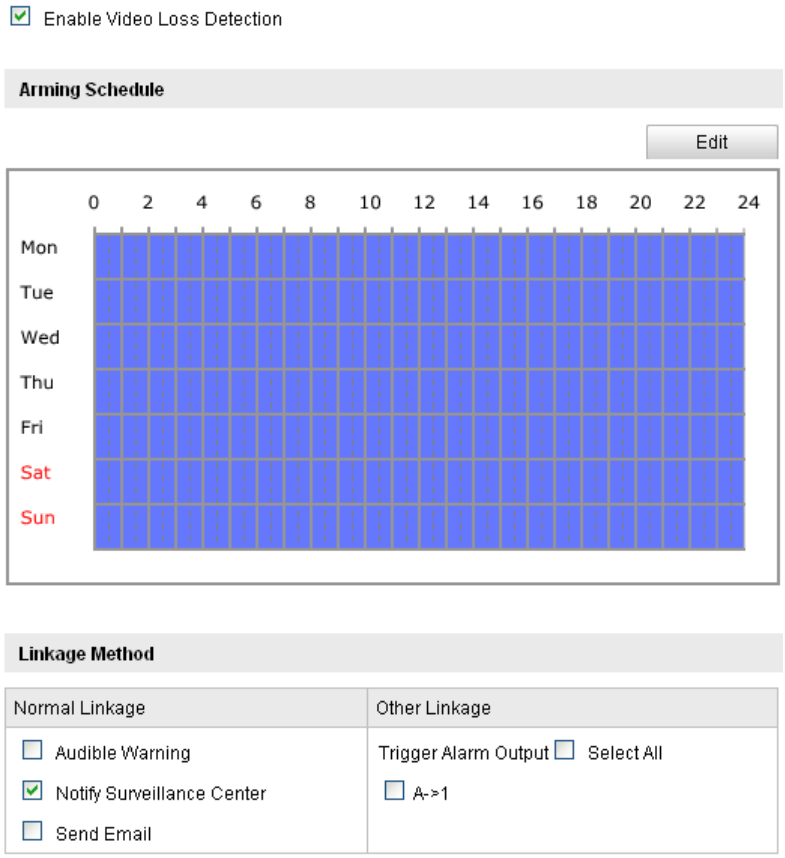

Figure 5-31 Video Loss

2. Check the **Enable Video Loss Detection** checkbox to enable the video loss detection.

3. Click Edit to edit the arming schedule for video loss detection. The arming schedule configuration is the same as the setting of the arming schedule for motion detection. Refer to *Step 2* ***Set the Arming Schedule for Motion Detection*** in *Section 6.6.1.*

4. Check the checkbox to select the linkage method taken for the video loss alarm. Audible warning, notify surveillance center, send email and trigger alarm output are selectable. Please *Step 3* ***Set the Alarm Actions for Motion Detection*** in *Section 6.6.1.*

5. Click Save to save the settings.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

5.6.4 Configuring External Alarm Input

Steps:

1. Enter the Alarm Input Settings interface:

Configuration > Advanced Configuration> Events > Alarm Input:

2. Choose the alarm input No. and the Alarm Type. The alarm type can be NO (Normally Open) and NC (Normally Closed). Edit the name to set a name for the alarm input (optional).

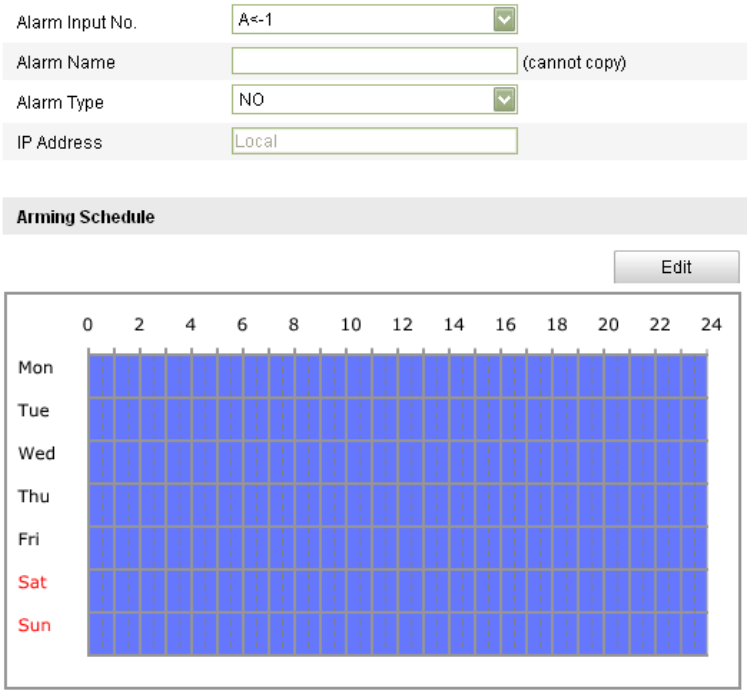

Figure 5-32 Alarm Input Settings

3. Click Edit to set the arming schedule for the alarm input. Refer to *Step 2* ***Set the Arming Schedule for Motion Detection*** in *Section 6.6.1.*
4. Check the checkbox to select the linkage method taken for the alarm input. Refer to *Step 3* ***Set the Alarm Actions for Motion Detection*** in *Section 6.6.1.*
5. You can also choose the PTZ linking for the alarm input if your camera is installed with a pan/tilt unit. Check the relative checkbox and select the No. to enable Preset Calling, Patrol Calling or Pattern Calling.
6. You can copy your settings to other alarm inputs.
7. Click Save to save the settings.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

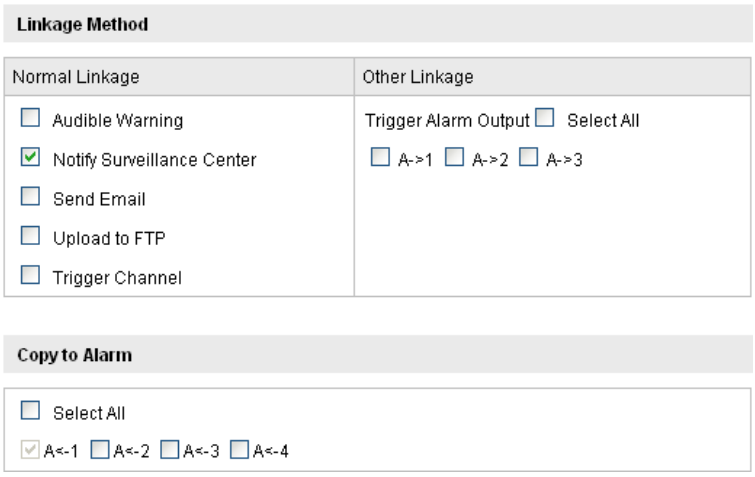

Figure 5-33 Linkage Method

5.6.5 Configuring Alarm Output

Steps:

1. Enter the Alarm Output Settings interface:

Configuration>Advanced Configuration> Events > Alarm Output

2. Select one alarm output channel in the **Alarm Output** drop-down list. You can also set a name for the alarm output (optional).
3. The **Delay** time can be set to **5sec, 10sec, 30sec, 1min, 2min, 5min, 10min** or **Manual**. The delay time refers to the time duration that the alarm output remains in effect after alarm occurs.
4. Click Edit to enter the **Edit Schedule Time** interface. The time schedule configuration is the same as the settings of the arming schedule for motion detection Refer to *Step 2* ***Set the Arming Schedule for Motion Detection*** in *Section 6.6.1.*
5. You can copy the settings to other alarm outputs.
6. Click Save to save the settings.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

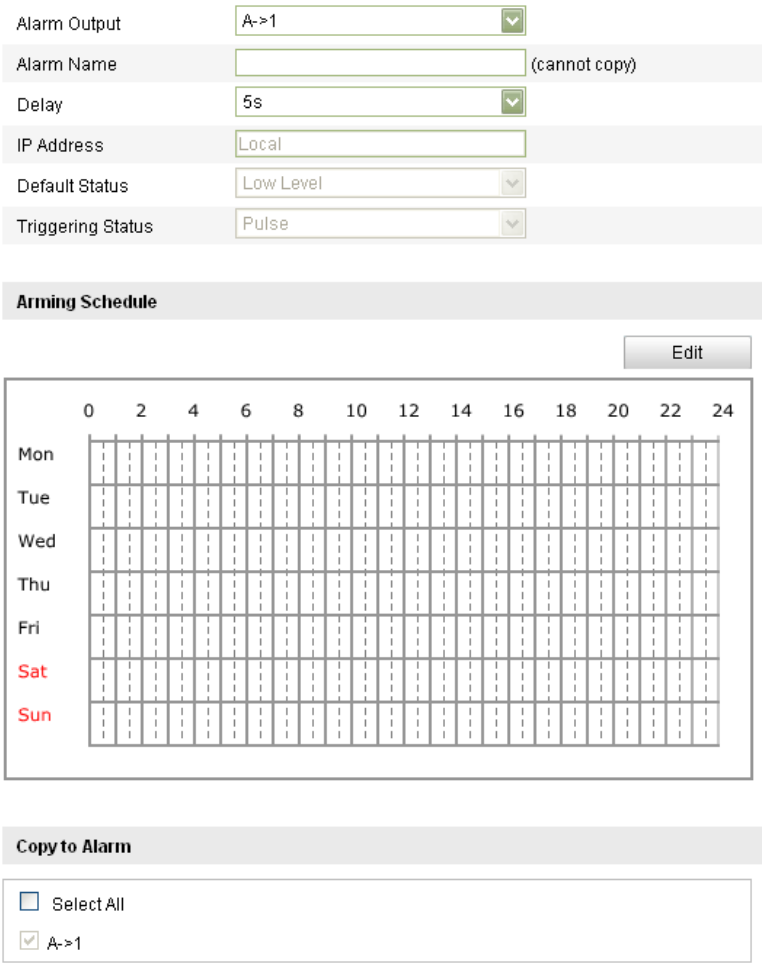

Figure 5-34 Alarm Output Settings

5.6.6 Handling Exception

The exception type can be HDD full, HDD error, network disconnected, IP address conflicted and illegal login to the cameras.

Steps:

1. Enter the Exception Settings interface:

Configuration > Advanced Configuration> Events > Exception

2. Check the checkbox to set the actions taken for the Exception alarm. Refer to *Step 3* ***Set the Alarm Actions Taken for Motion Detection*** in *Section 6.6.1.*

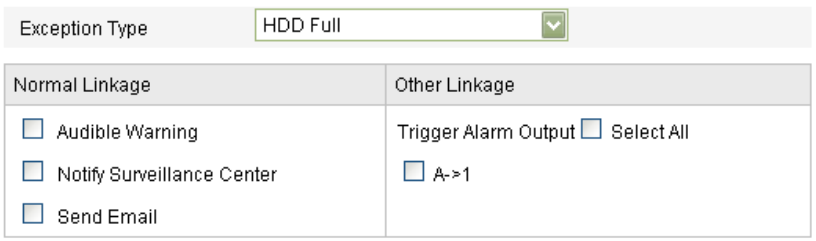

Figure 5-35 Exception Settings

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

3. Click Save to save the settings.

5.6.7 Configuring Email Settings

Purpose:

The system can be configured to send an Email notification to all designated receivers if an alarm event is detected, e.g., motion detection event, video loss, tamper-proof, etc.

Before you start:

Please configure the DNS Server settings under **Basic Configuration > Network > TCP/IP** or **Advanced Configuration > Network > TCP/IP** before using the Email function.

Steps:

1. Enter the TCP/IP Settings (**Configuration > Basic Configuration > Network > TCP/IP** or **Configuration > Advanced Configuration > Network > TCP/IP)** to set the IPv4 Address, IPv4 Subnet Mask, IPv4 Default Gateway and the Preferred DNS Server.
   Note: Please refer to *Section 6.3.1* ***Configuring TCP/IP Settings*** for detailed information.
2. Enter the Email Settings interface:

Configuration > Advanced Configuration > Events > Email

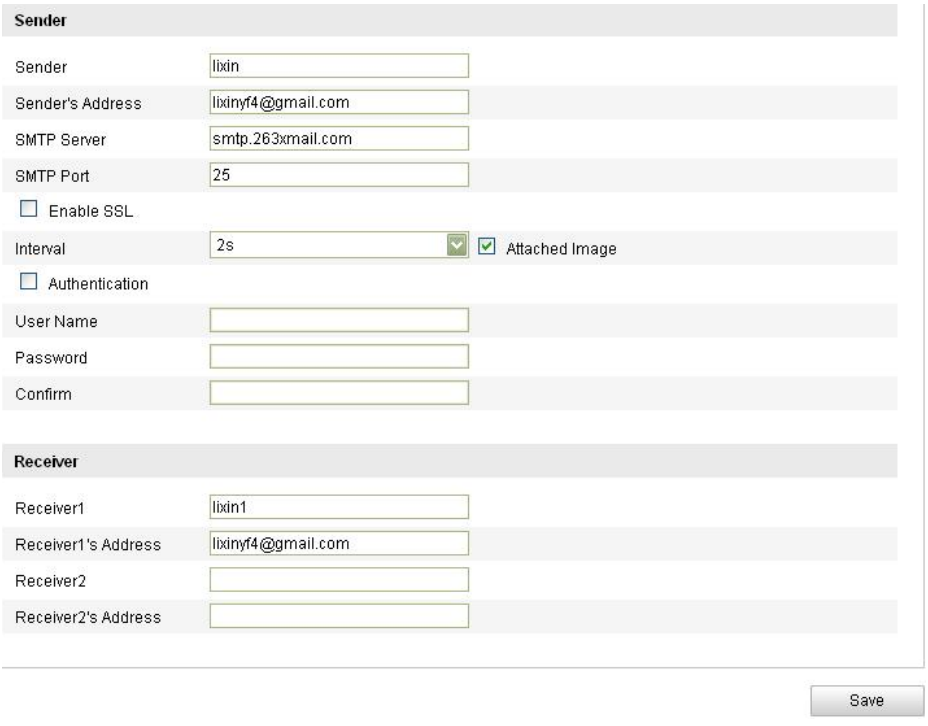

Figure 5-36 Email Settings

3. Configure the following settings:
   Sender: The name of the email sender.
   Sender's Address: The email address of the sender.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

SMTP Server: The SMTP Server IP address or host name (e.g., smtp.263xmail.com).

SMTP Port: The SMTP port. The default TCP/IP port for SMTP is 25 (not secured). And the SSL SMTP port is 465.

Enable SSL: Check the checkbox to enable SSL if it is required by the SMTP server.

Attached Image: Check the checkbox of Attached Image if you want to send emails with attached alarm images.

Interval: The interval refers to the time between two actions of sending attached pictures.

Authentication (optional): If your email server requires authentication, check this checkbox to use authentication to log in to this server and enter the login user Name and password.

Choose Receiver: Select the receiver to which the email is sent. Up to 2 receivers can be configured.

Receiver: The name of the user to be notified.

Receiver's Address: The email address of user to be notified.

4. Click Save to save the settings.

5.6.8 Configuring Snapshot Settings

Purpose:

You can configure the scheduled snapshot and event-triggered snapshot. The captured picture can be stored in the SD card (if supported) or the netHDD (For detailed information about netHDD, please refer to *Section 7.1* ***Configuring NAS Settings***). You can also upload the captured pictures to a FTP server.

Basic Settings

Steps:

1. Enter the Snapshot Settings interface:

Configuration > Advanced Configuration > Events > Snapshot

2. Check the **Enable Timing Snapshot** checkbox to enable continuous snapshot. Check the **Enable Event-triggered Snapshot** checkbox to check event-triggered snapshot.
3. Select the quality of the snapshot.
4. Set the time interval between two snapshots.
5. Click Save to save the settings.

Uploading to FTP

You can follow below configuration instructions to upload the snapshots to FTP.

- Upload continuous snapshots to FTP

Steps:

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

1) Configure the FTP settings and check Upload Picture checkbox in FTP Settings interface. Please refer to *Section 6.3.8* ***Configuring FTP Settings*** for more details to configure FTP parameters.
2) Check the **Enable Timing Snapshot** checkbox.

- Upload event-triggered snapshots to FTP

Steps:

1) Configure the FTP settings and check Upload Picture checkbox in FTP Settings interface. Please refer to *Section 6.3.8* ***Configuring FTP Settings*** for more details to configure FTP parameters.
2) Check Upload to FTP checkbox in Motion Detection Settings or Alarm Input interface. Please refer to *Step 3* ***Set the Alarm Actions Taken for Motion Detection*** in *Section 6.6.1, or Step 4* ***Configuring External Alarm Input*** in *Section 6.6.4.*
3) Check the **Enable Event-triggered Snapshot** checkbox.

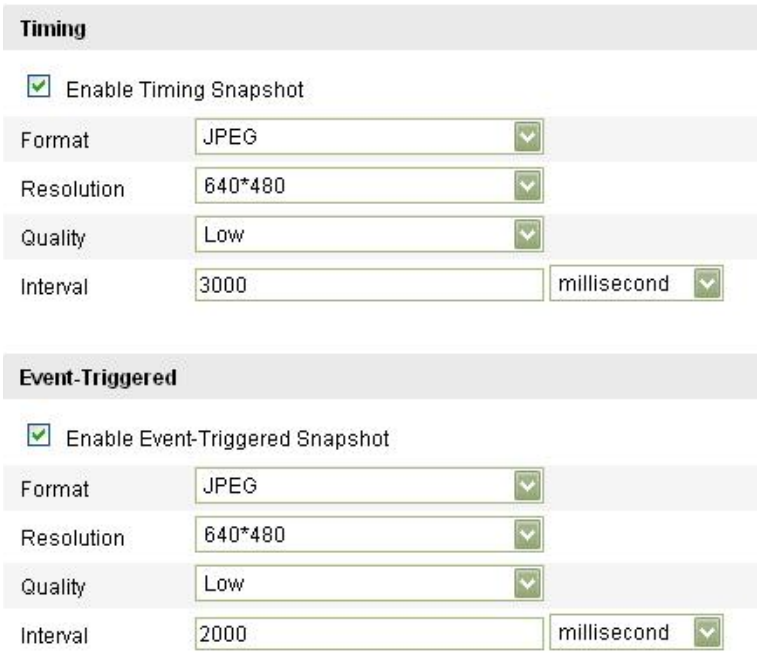

Figure 5-37 Snapshot Settings

Chapter 6 Storage Settings

Before you start:

To configure record settings, please make sure that you have the network storage device within the network or the SD card inserted in your camera.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

6.1 Configuring NAS Settings

Before you start:

The network disk should be available within the network and properly configured to store the recorded files, log files, etc.

Steps:

1. Add the network disk

   (1) Enter the NAS (Network-Attached Storage) Settings interface:

Configuration > Advanced Configuration > Storage > NAS

HDD No.	Type	Server Address	File Path
1	NAS	172.6.21.99	/dvr/test01
2	NAS		
3	NAS		
4	NAS		
5	NAS		
6	NAS		
7	NAS		
8	NAS		

Figure 6-1 Add Network Disk

(2) Enter the IP address of the network disk, and the default file path is */dvr/share*.

Note: The network disk file path name *share* is user-defined while creating the DVR network storage. Please refer to the *User Manual of NAS* for creating the file path.

(3) Click Save to add the network disk.

Note: After having saved successfully, you need to reboot the camera to activate the settings.

2. Initialize the added network disk.

   (1) Enter the HDD Settings interface (**Advanced Configuration > Storage > Storage Management**), in which you can view the capacity, free space, status, type and property of the disk.

HDD Device List — Format

HDD No.	Capacity	Free space	Status	Type	Property	Progress
9	195.30GB	0.00GB	Uninitialized	NAS	R/W	

Figure 6-2 Initialize Disk

(2) If the status of the disk is **Uninitialized**, check the corresponding checkbox to select the disk and click Format to start initializing the disk.

HDD Device List — Format

HDD No.	Capacity	Free space	Status	Type	Property	Progress
9	195.30GB	0.00GB	Uninitialized	NAS	R/W	75%

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Figure 6-3 Initializing

When the initialization completed, the status of disk will become **Normal.**

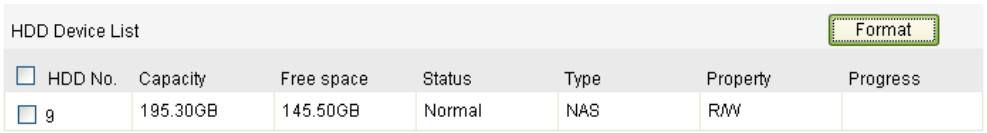

Figure 6-4 View Disk Status

Notes:

- Up to 8 NAS disks can be connected to the camera.
- To initialize and use the SD card after insert it to the camera, please refer to the steps of NAS disk initialization.

6.2 Configuring Recording Schedule

Purpose:

There are two kinds of recording for the cameras: manual recording and scheduled recording. For the manual recording, refer to *Section 4.3* ***Recording and Capturing Pictures Manually***. In this section, you can follow the instructions to configure the scheduled recording. By default, the record files of scheduled recording are stored in the SD card (if supported) or in the network disk.

Steps:

1. Enter the Record Schedule Settings interface:

Configuration > Advanced Configuration> Storage > Record Schedule

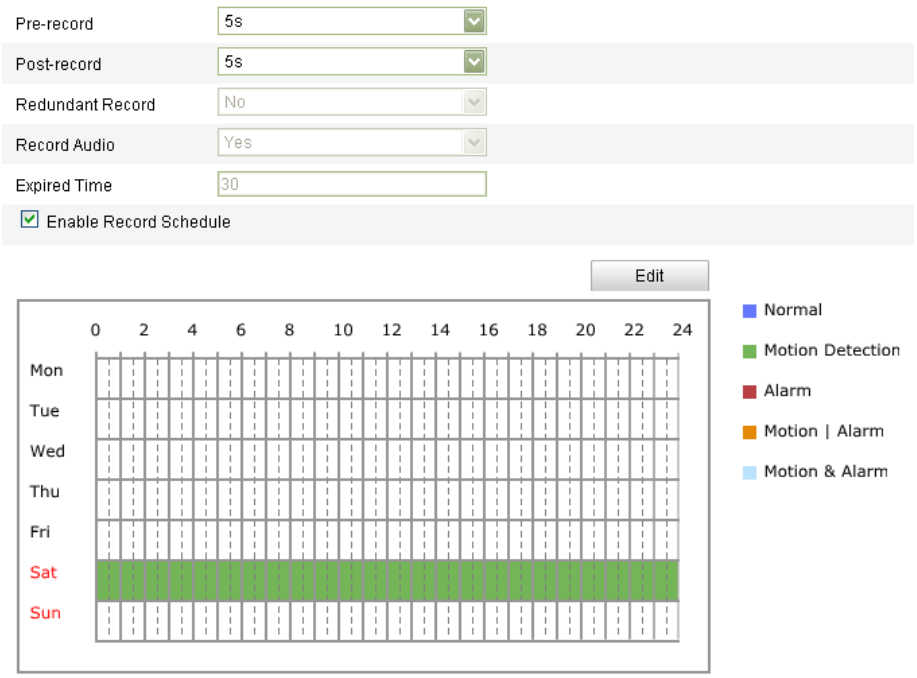

Figure 6-5 Recording Schedule Interface

2. Check the checkbox of **Enable Record Schedule** to enable scheduled recording.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

3. Set the record parameters of the camera.

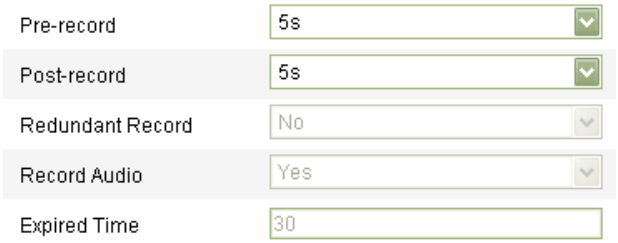

Figure 6-6 Record Parameters

- Pre-record: The time you set to start recording before the scheduled time or the event. For example, if an alarm triggers recording at 10:00, and the pre-record time is set as 5 seconds, the camera starts to record at 9:59:55.
  The Pre-record time can be configured as No Pre-record, 5 s, 10 s, 15 s, 20 s, 25 s, 30 s or not limited.
- Post-record: The time you set to stop recording after the scheduled time or the event. For example, if an alarm triggered recording ends at 11:00, and the post-record time is set as 5 seconds, the camera records until 11:00:05.
  The Post-record time can be configured as 5 s, 10 s, 30 s, 1 min, 2 min, 5 min or 10 min.

Note: The record parameter configurations vary depending on the camera model.

4. Click Edit to edit the record schedule.

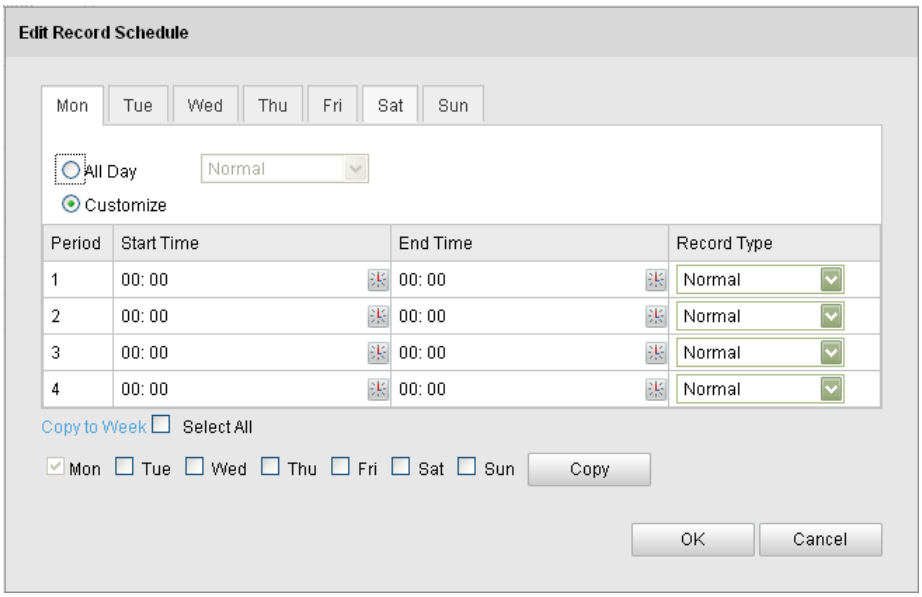

Figure 6-7 Record Schedule

5. Choose the day to set the record schedule.
   (1) Set all-day record or segment record:
   - If you want to configure the all-day recording, please check the **All Day** checkbox.
   - If you want to record in different time sections, check the **Customize** checkbox. Set the **Start Time** and **End Time.**

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Note: The time of each segment can't be overlapped. Up to 4 segments can be configured.

(2) Select a **Record Type**. The record type can be Normal, Motion Detection, Alarm, Motion | Alarm, Motion & Alarm, PIR Alarm, Wireless Alarm, Manual Alarm or PIR | Wireless | Manual.

- **Normal**

  If you select **Normal**, the video will be recorded automatically according to the time of the schedule.

- **Record Triggered by Motion Detection**

  If you select **Motion Detection**, the video will be recorded when the motion is detected.

  Besides configuring the recording schedule, you have to set the motion detection area and check the checkbox of **Trigger Channel** in the **Linkage Method** of Motion Detection Settings interface. For detailed information, please refer to the *Step 1* ***Set the Motion Detection Area*** *in the Section 5.6.1.*

- **Record Triggered by Alarm**

  If you select **Alarm**, the video will be recorded when the alarm is triggered via the external alarm input channels.

  Besides configuring the recording schedule, you have to set the **Alarm Type** and check the checkbox of **Trigger Channel** in the **Linkage Method** of **Alarm Input Settings** interface. For detailed information, please refer to *Section 5.6.4*.

- **Record Triggered by Motion & Alarm**

  If you select **Motion & Alarm**, the video will be recorded when the motion and alarm are triggered at the same time.

  Besides configuring the recording schedule, you have to configure the settings on the **Motion Detection** and **Alarm Input Settings** interfaces. Please refer to *Section 5.6.1* and *Section 5.6.4* for detailed information.

- **Record Triggered by Motion | Alarm**

  If you select **Motion | Alarm**, the video will be recorded when the external alarm is triggered or the motion is detected.

  Besides configuring the recording schedule, you have to configure the settings on the **Motion Detection** and **Alarm Input Settings** interfaces. Please refer to *Section 5.6.1* and *Section 5.6.4* for detailed information.

- **Record Triggered by PIR Alarm**

  If you select **PIR Alarm**, the video will be recorded when the PIR alarm is detected.

  Besides configuring the recording schedule, you have to set the PIR alarm and check the checkbox of **Trigger Channel** in the **Normal Linkage** of PIR Alarm in Other Alarm Settings interface. For detailed information, please refer to *Step 2* ***Configure the PIR Alarm*** *in the Section 5.6.9.*

- **Record Triggered by Wireless Alarm**

  If you select **Wireless Alarm**, the video will be recorded when the wireless

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

alarm is detected.

Besides configuring the recording schedule, you have to set the wireless alarm and check the checkbox of **Trigger Channel** in the **Normal Linkage** of Wireless Alarm in Other Alarm Settings interface. For detailed information, please refer to *Step 1* ***Configure the Wireless Alarm*** *in the Section 5.6.9.*

- **Record Triggered by Manual Alarm**

  If you select **Manual Alarm**, the video will be recorded when manual alarm is triggered.

- **Record Triggered by PIR | Wireless | Manual**

  If you select **PIR | Wireless | Manual,** the video will be recorded when the PIR alarm or wireless alarm or manual alarm is detected.

  Besides configuring the recording schedule, you have to configure the settings for wireless alarm and PIR alarm in Other Alarm Settings interface. For detailed information, please refer to *Section 5.6.9.*

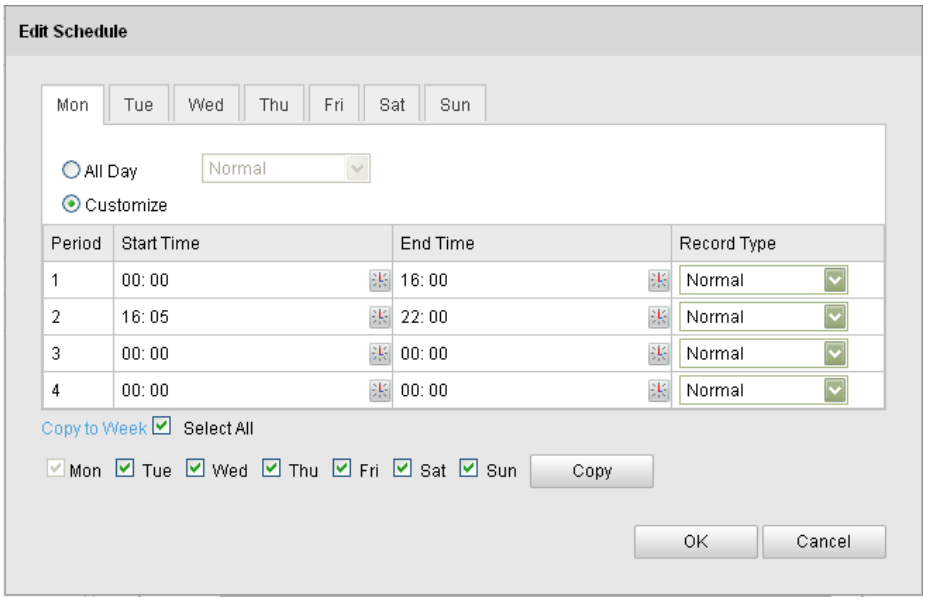

Figure 6-8 Edit Record Schedule

(3) Check the checkbox Select All and click Copy to copy settings of this day to the whole week. You can also check any of the checkboxes before the date and click Copy.

(4) Click OK to save the settings and exit the **Edit Record Schedule** interface.

6. Click Save to save the settings.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Chapter 7 Playback

Purpose:

This section explains how to view the remotely recorded video files stored in the network disks or SD cards.

Steps:

1. Click Playback on the menu bar to enter playback interface.

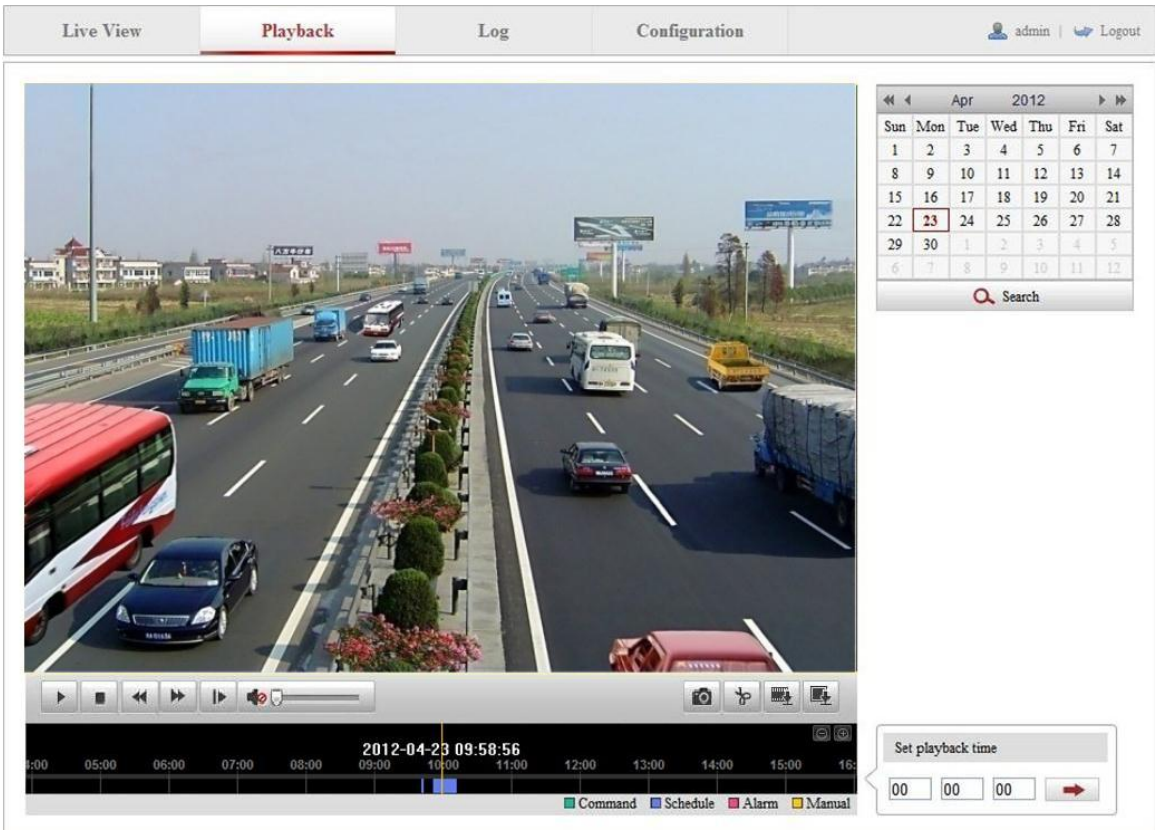

Figure 7-1 Playback Interface

2. Select the date and click Search.

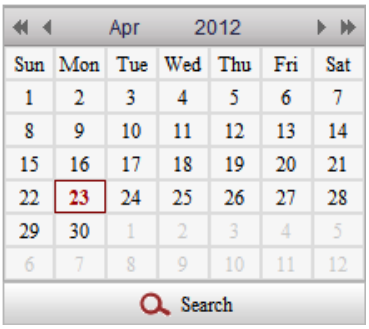

Figure 7-2 Search Video

3. Click to play the video files found on this date.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

The toolbar on the bottom of Playback interface can be used to control playing process.



Figure 7-3 Playback Toolbar

Table 7-1 Description of the buttons

Button	Operation	Button	Operation
	Play		Capture a picture
	Pause	/	Start/Stop clipping video files
	Stop	/	Audio on and adjust volume/Mute
	Speed down		Download video files
	Speed up		Download captured pictures
	Playback by frame		

Note: You can choose the file paths locally for downloaded playback video files and pictures in Local Configuration interface. Please refer to *Section 5.1* for details.

Drag the progress bar with the mouse to locate the exact playback point. You can also input the time and click to locate the playback point in the **Set playback time** field. You can also click to zoom out/in the progress bar.



Figure 7-4 Set Playback Time

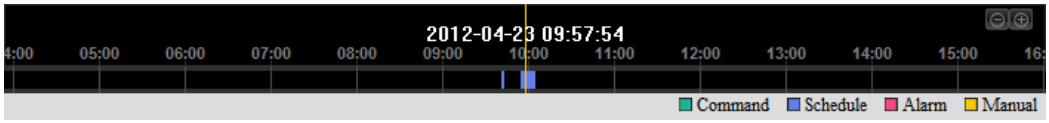

Figure 7-5 Progress Bar

The different colors of the video on the progress bar stand for the different video types.



Figure 7-6 Video Types

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Chapter 8 Log Searching

Purpose:

The operation, alarm, exception and information of the camera can be stored in log files. You can also export the log files on your demand.

Before you start:

Please configure network storage for the camera or insert a SD card in the camera.

Steps:

1. Click Log on the menu bar to enter log searching interface.

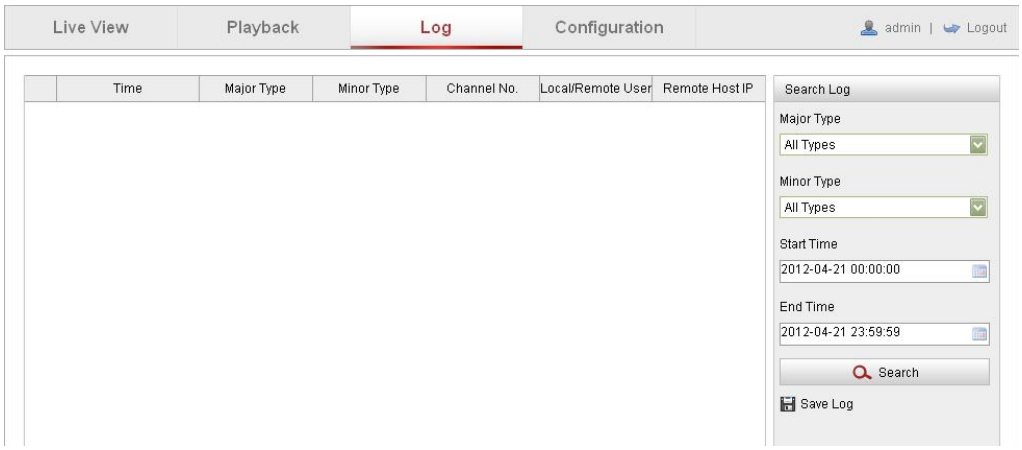

Figure 8-1 Log Searching Interface

2. Set the log search conditions to specify the search, including the Major Type, Minor Type, Start Time and End Time.
3. Click Search to search log files. The matched log files will be displayed on the **Log** interface.

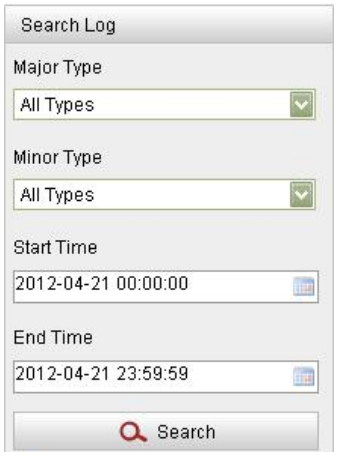

Figure 8-2 Log Searching

4. To export the log files, click Save Log to save the log files in your computer.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Chapter 9 Others

9.1 Managing User Accounts

Enter the User Management interface:
Configuration >Basic Configuration> Security > User
Or Configuration > Advanced Configuration> Security > User
The **admin** user has access to create, modify or delete other accounts. Up to 15 user accounts can be created.

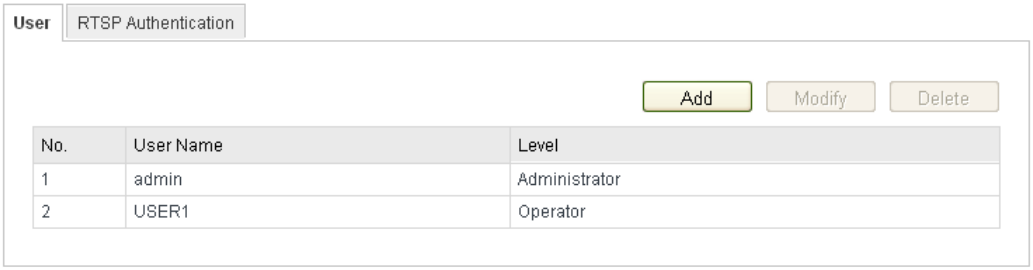

Figure 9-1 User Information

- Add a User

Steps:

1. Click Add to add a user.
2. Input the new **User Name**, select **Level** and input **Password.**

Note: The level indicates the permissions you give to the user. You can define the user as **Operator** or **User**.

3. In the **Basic Permission** field and **Camera Configuration** field, you can check or uncheck the permissions for the new user.
4. Click OK to finish the user addition.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

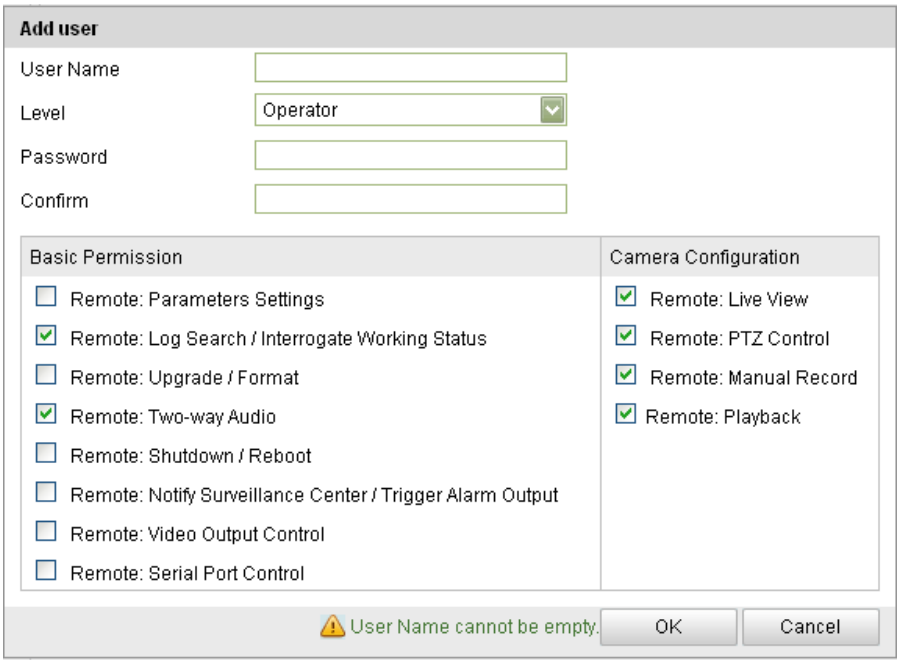

Figure 9-2 Add a User

- Modify a User

Steps:

1. Left-click to select the user from the list and click Modify.
2. Modify the **User Name**, **Level** or **Password**.
3. In the **Basic Permission** field and **Camera Configuration** field, you can check or uncheck the permissions.
4. Click OK to finish the user modification.

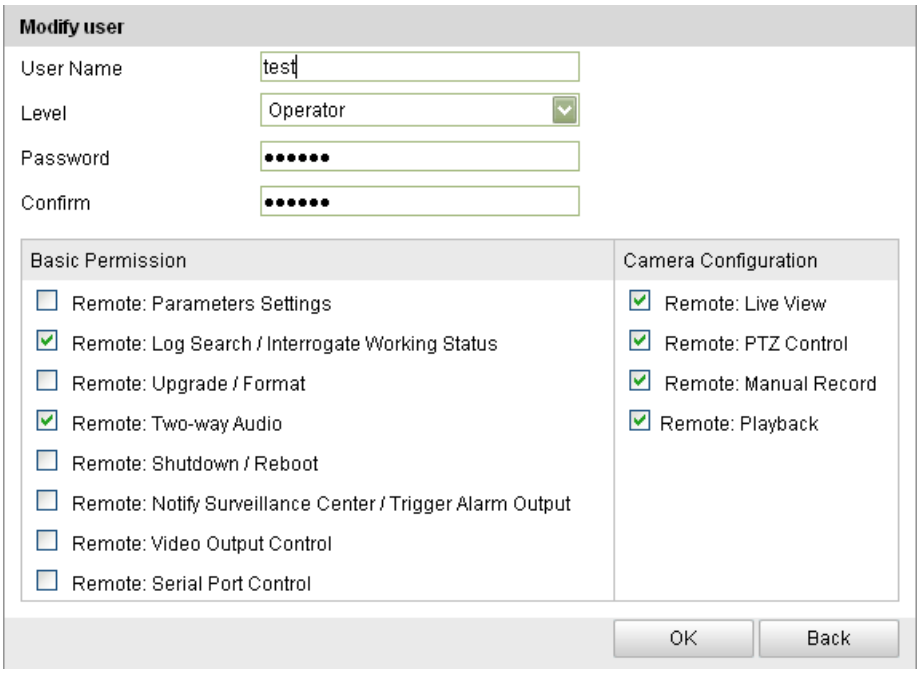

Figure 9-3 Modify a User

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

- Delete a User

Steps:

1. Left-click the user name you want to delete and click Delete.
2. Click OK on the pop-up dialogue box to delete the user.

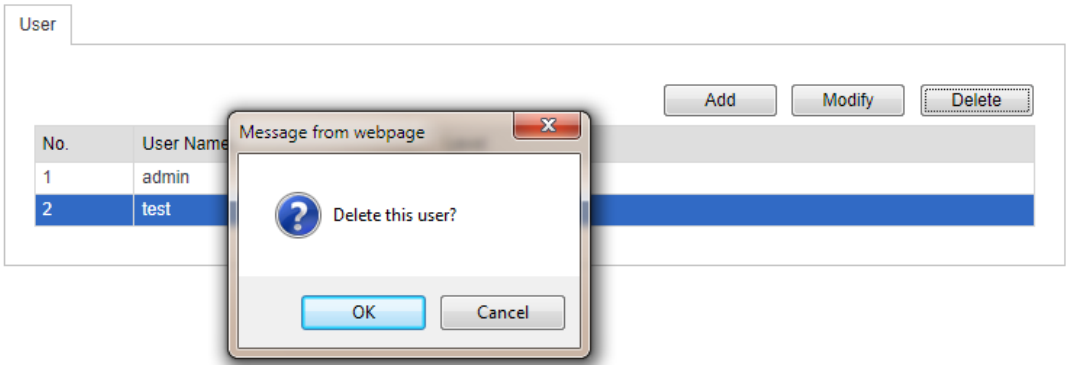

Figure 9-4 Delete a User

9.2 Configuring RTSP Authentication

Purpose:

You can specifically secure the stream data of live view.

Steps:

1. Enter the RTSP Authentication interface:

Configuration> Advanced Configuration> Security > RTSP Authentication

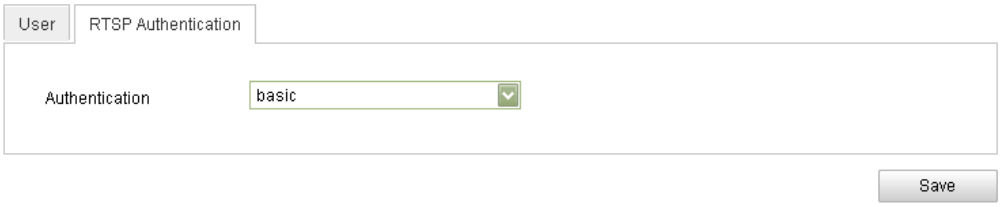

Figure 9-5 RTSP Authentication

2. Select the **Authentication** type **basic** or **disable** in the drop-down list to enable or disable the RTSP authentication.

Note: If you disable the RTSP authentication, anyone can access the video stream by the RTSP protocol via the IP address.

3. Click Save to save the settings.

9.3 Viewing Device Information

Enter the Device Information interface:

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Configuration > Basic Configuration> System > Device Information
Or **Configuration > Advanced Configuration> System > Device Information**
In the **Device Information** interface, you can edit the Device Name.
Other information of the network camera, such as Model, Serial No., Firmware Version, Encoding Version, Number of Channels, Number of HDDs, Number of Alarm Input and Number of Alarm Output are displayed. The information cannot be changed in this menu. It is the reference for maintenance or modification in future.

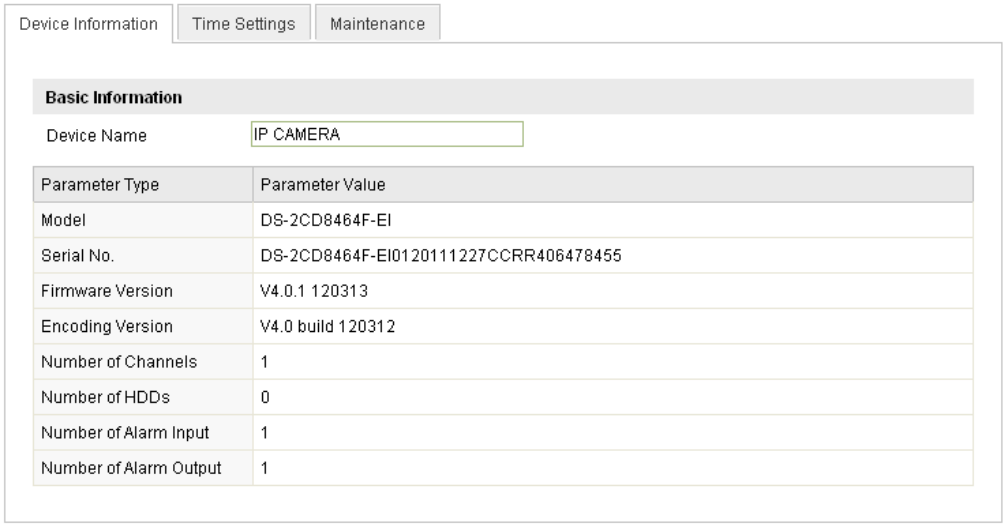

Figure 9-6 Device Information

9.4 Maintenance

9.4.1 Rebooting the Camera

Steps:

1. Enter the Maintenance interface:

Configuration > Basic Configuration> System > Maintenance
Or **Configuration > Advanced Configuration> System > Maintenance:**

2. Click Reboot to reboot the network camera.

Figure 9-7 Reboot the Device

9.4.2 Restoring Default Settings

Steps:

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

1. Enter the Maintenance interface:

Configuration > Basic Configuration> System > Maintenance

Or **Configuration > Advanced Configuration> System > Maintenance**

2. Click Restore or Default to restore the default settings.

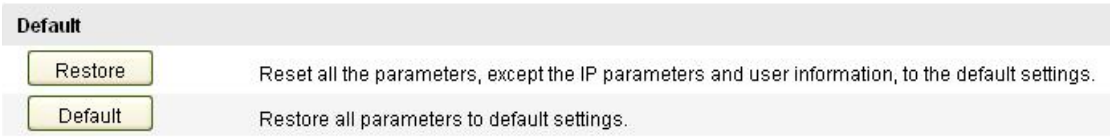
Default
Restore
Reset all the parameters, except the IP parameters and user information, to the default settings.
Default
Restore all parameters to default settings.

Figure 9-8 Restore Default Settings

Note: After restoring the default settings, the IP address is also restored to the default IP address, please be careful for this action.

9.4.3 Importing/Exporting Configuration File

Steps:

Enter the Maintenance interface:

Configuration > Basic Configuration> System > Maintenance

Or **Configuration > Advanced Configuration> System > Maintenance**

1. Click Browse to select the local configuration file and then click Import to start importing configuration file.

   Note: You need to reboot the camera after importing configuration file.

2. Click Export and set the saving path to save the configuration file in local storage.

Figure 9-9 Import/Export Configuration File

9.4.4 Upgrading the System

Steps:

1. Enter the Maintenance interface:

Configuration > Basic Configuration> System > Maintenance

Or **Configuration > Advanced Configuration> System > Maintenance**

2. Click Browse to select the local upgrade file and then click Upgrade to start

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

remote upgrade.

Note: The upgrading process will take 1 to 10 minutes. Please don't disconnect power of the camera during the process. The camera reboots automatically after upgrading.

Figure 9-10 Remote Upgrade

9.5 RS-232 Settings

Purpose:

The RS-232 port can be used in two ways:

- Parameters Configuration: Connect a computer to the camera through the serial port. Device parameters can be configured by using software such as HyperTerminal. The serial port parameters must be the same as the serial port parameters of the camera.
- Transparent Channel: Connect a serial device directly to the camera. The serial device will be controlled remotely by the computer through the network.

Steps:

1. Enter RS-232 Port Setting interface:

Configuration> Advanced Configuration> System > RS232

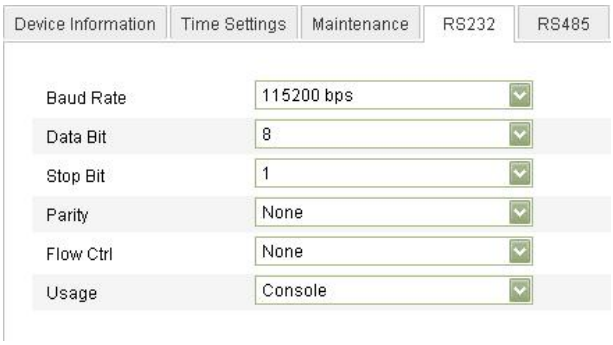

Figure 9-11 RS-232 Settings

Note: If you want to connect the camera by the RS-232 port, the parameters of the RS-232 should be exactly the same with the parameters you configured here.

2. Click Save to save the settings.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

9.6 RS-485 Settings

Purpose:

The RS-485 serial port is used to control the PTZ of the camera. The configuring of the PTZ parameters should be done before you control the PTZ unit.

Steps:

1. Enter RS-485 Port Setting interface:

Configuration> Advanced Configuration> System > RS485

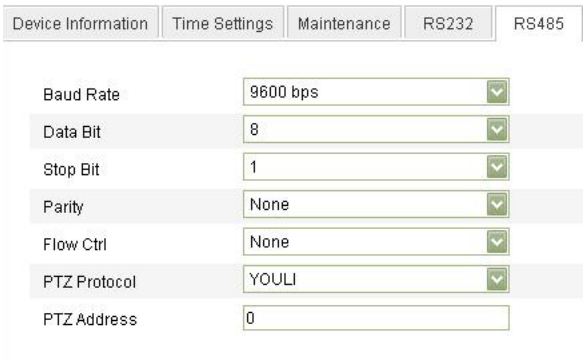

Figure 9-12 RS-485 Settings

2. Set the RS-485 parameters and click Save to save the settings.

   By default, the Baud Rate is set as 9600 bps, the Data Bit is 8, the stop bit is 1 and the Parity and Flow Control is None.

   Note: The Baud Rate, PTZ Protocol and PTZ Address parameters should be exactly the same as the PTZ camera parameters.

Appendix

Appendix 1 SADP Software Introduction

- **Description of SADP V 2.0**

SADP (Search Active Devices Protocol) is a kind of user-friendly and installation-free online device search tool. It searches the active online devices within your subnet and displays the information of the devices. You can also modify the basic network information of the devices using this software.

- **Search active devices online**

  - **Search online devices automatically**

    After launch the SADP software, it automatically searches the online devices every 15 seconds from the subnet where your computer locates. It displays the total number and information of the searched devices in the Online Devices interface. Device information including the device type, IP address,

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

port number, gateway, etc. will be displayed.

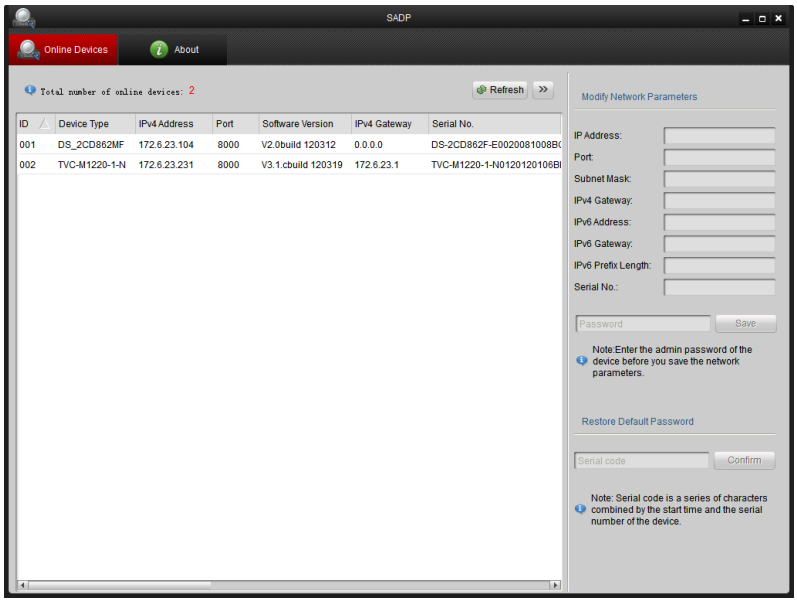

Figure A.1.1 Searching Online Devices

Note: Device can be searched and displayed in the list in 15 seconds after it went online; it will be removed from the list in 45 seconds after it went offline.

- **Search online devices manually**

  You can also click Refresh to refresh the online device list manually. The newly searched devices will be added to the list.

  Note: You can click △ or ▽ on each column heading to order the information; you can click » to expand the device table and hide the network parameter panel on the right side, or click « to show the network parameter panel.

Modify network parameters

Steps:

1. Select the device to be modified in the device list and the network parameters of the device will be displayed in the **Modify Network Parameters** panel on the right side.
2. Edit the modifiable network parameters, e.g. IP address and port number.
3. Enter the password of the admin account of the device in the **Password** field and click Save to save the changes.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

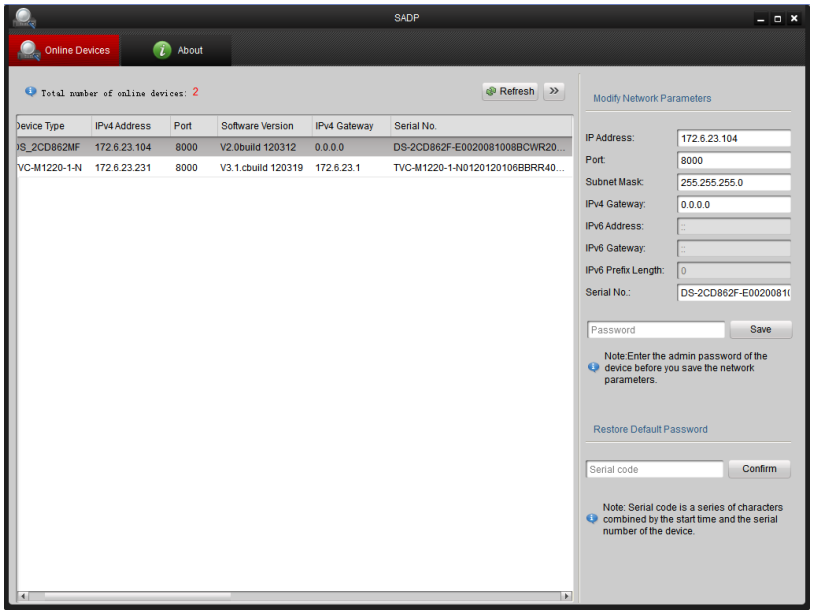

Figure A.1.2 Modify Network Parameters

- **Restore default password**

Steps:

1. Contact our technical engineers to get the serial code.

Note: Serial code is a series of characters combined by the start time and the serial number of the device.

2. Input the code in the **Serial code** field and click Confirm to restore the default password.

.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

Appendix 2 Port Mapping

The following settings are for TP-LINK router (TL-R410). The settings vary depending on different models of routers.

Steps:

1. Select the **WAN Connection Type**, as shown below:

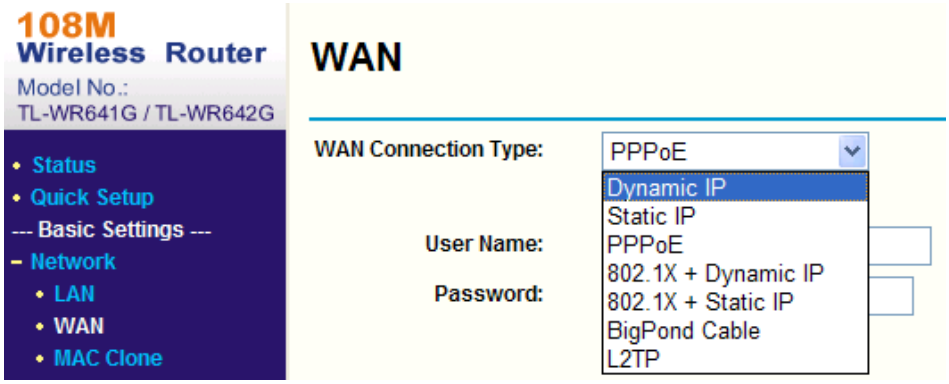

Figure A.2.1 Select the WAN Connection Type

2. Set the **LAN** parameters of the router as in the following figure, including IP address and subnet mask settings.

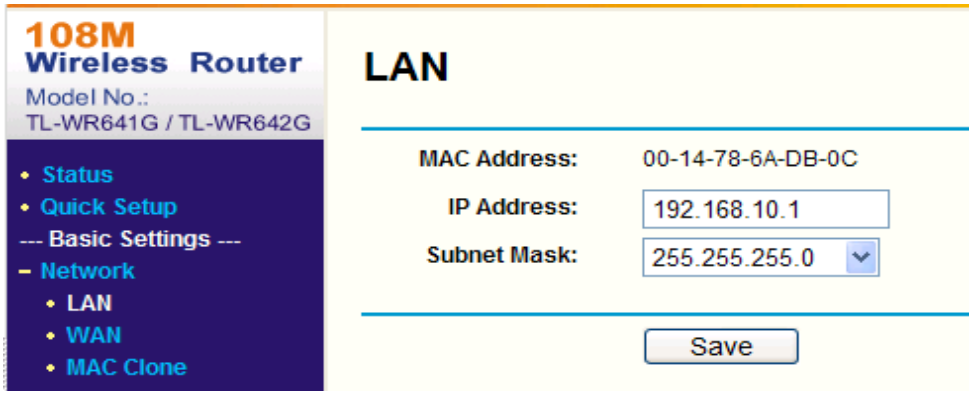

Figure A.2.2 Set the LAN parameters

3. Set the port mapping in the virtual severs of **Forwarding**. By default, camera uses port 80, 8000, 554 and 8200. You can change these ports value with web browser or client software.

Example:

When the cameras are connected to the same router, you can configure the ports of a camera as 80, 8000, 554 and 8200 with IP address 192.168.1.23, and the

ports of another camera as 81, 8001, 555, 8201 with IP 192.168.1.24. Refer to the steps as below:

Note: The 8200 port changes with the 8000 port with a constant value of 200. E.g. if the 8000 port is changed to 8005, then the 8200 port should be changed to 8205.

Steps:

1. As the settings mentioned above, map the port 80, 8000, 554 and 8200 for the network camera at 192.168.1.23
2. Map the port 81, 8001, 555 and 8201 for the network camera at 192.168.1.24.
3. Enable **ALL** or **TCP** protocols.
4. Check the **Enable** checkbox and click Save.

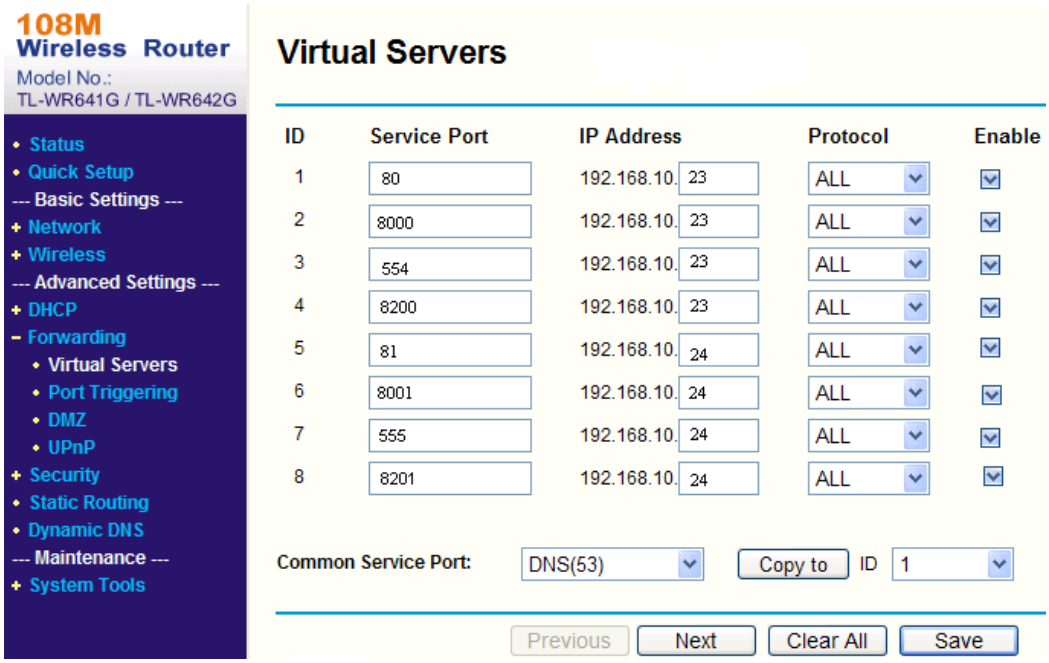

Figure A.2.3 Port Mapping

Note: The port of the network camera cannot conflict with other ports. For example, some web management port of the router is 80. Change the camera port if it is the same as the management port.

© Hikvision Digital Technology Co., Ltd. All Rights Reserved.

First Choice for Security Professionals